


METEOR

M20W130R-BK-TRI

SAP CODE: 2002201

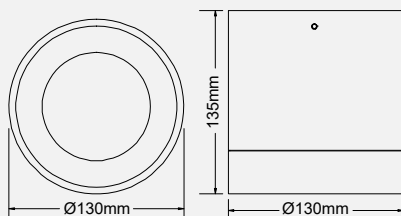


Sleek, low glare design.

The METEOR is a surface mounted tubular downlight with a recessed clear lens and multifaceted specular reflector, which provides optimum glare control. It is ideal for architectural indoor and outdoor applications.



PHOTOMETRIC DIAGRAM


 Unit: cd
 - C0/180 59.4deg
 - C90/270 65.2deg

KEY INFORMATION

Watts	20W
Input Power	20W
Lumen Output	1480lm / 1740lm / 1650lm
Install	Surface Mount
Dimming Options	Phase-Cut Dimming
Fitting Colour	Matte Black RAL 9005
Warranty	5 Years
IP Rating	IP54
IK Rating	N/A
IC Rating	N/A
Rebate Scheme Approval	-

PHOTOMETRIC

Efficacy	70lm/W / 85lm/W / 75lm/W
LED	Dual color COB
CCT	3000 / 4000 / 5000K
CRI	>80
Beam Angle	60°

ELECTRICAL

Driver	Integral
Supply Input	220-240V a.c. 50/60Hz
Driver Output Voltage	40V
Power Factor	>0.9
LED Input Current (nominal)	500mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

SDCM	<5
Housing	Aluminium
Optics	Multifaceted specular reflector
Adjustable Angle	N/A
Fixings/Hardware	Mounting Screws
Connection Type	Push button terminals
Total Weight	1.27kg
Dimensions	Ø130x135mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 2