


# METEOR

**M35W160R-WH-3K**

SAP CODE: 2002246

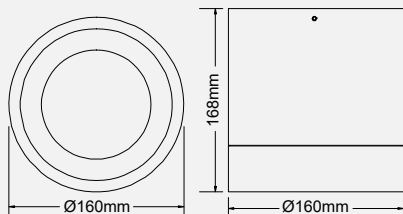


## Sleek, low glare design.

The METEOR is a surface mounted tubular downlight with a recessed clear lens and multifaceted specular reflector, which provides optimum glare control. It is ideal for architectural indoor and outdoor applications.



## PHOTOMETRIC DIAGRAM


 Unit: cd  
 - C0/180 62.4deg  
 - C90/270 62.4deg

### KEY INFORMATION

Watts	35W
Input Power	35W
Lumen Output	4000lm
Install	Surface Mount
Dimming Options	Phase-Cut Dimming
Fitting Colour	Matte White RAL 9010
Warranty	5 Years
IP Rating	IP54
IK Rating	N/A
IC Rating	N/A
Rebate Scheme Approval	-

### PHOTOMETRIC

Efficacy	110lm/W
LED	COB
CCT	3000K
CRI	>80
Beam Angle	65°

### ELECTRICAL

Driver	Integral
Supply Input	220-240V a.c. 50/60Hz
Driver Output Voltage	40V
Power Factor	>0.9
LED Input Current (nominal)	900mA
Useful life @Ta25° (L70)	50,000hr

### CONSTRUCTION

SDCM	<5
Housing	Aluminium
Optics	Multifaceted specular reflector
Adjustable Angle	N/A
Fixings/Hardware	Mounting Screws
Connection Type	Push button terminals
Total Weight	2.1kg
Dimensions	Ø160x168mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 2