



MATRIX EVO G2

MATX0312-EV-G2

SAP CODE: 2002707


Streamlined solution, competitive Value.

Introducing the MATRIX EVO G2, the ultimate lighting solution for discerning businesses. This highly efficient, tritone selectable backlit panel offers unparalleled versatility and performance, making it a perfect fit for any workspace.


APPLICATIONS

Showrooms, Offices, Boardroom / Meeting Rooms, Function Areas, Education Facilities, Storage Rooms

DIMENSION DIAGRAMS

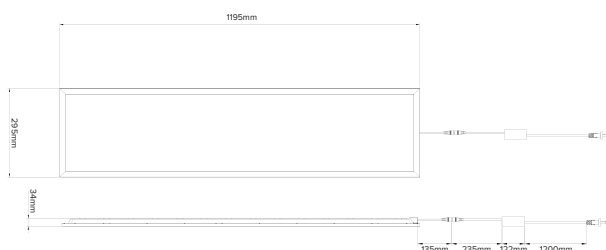

PHOTOMETRIC DIAGRAM



Unit: cd

— C0/180 89.0deg

— C90/270 89.9deg

KEY INFORMATION

Power	28 W 36 W 40 W
Lumen Output	2810 / 3175 / 2910 lm 3566 / 3969 / 3820 lm 3911 / 4384 / 4192 lm
Mounting Type	Metric T-Bar Ceiling Grid
Dimming Type	Non-Dimmable
Fascia Colour	White RAL9003
IP Rating	IP40
Operating Ambient Temp.	-20 to 40°C
Connection Type	DC connector 1.2m Flex & Plug
Driver	Remote
Warranty	5 yrs

PHOTOMETRIC

Efficacy	28 W: 105 / 118 / 108 lm/W 36 W: 99 / 115 / 105 lm/W 40 W: 97 / 113 / 103 lm/W
CCT	3000 / 4000 / 5000 K
CRI	> 80
SDCM	< 5
UGR	< 19
Beam Angle	90°
Flicker-Free	Yes
Projected Lifespan	>54,000hrs @ Ta 25°C (L70)

ELECTRICAL

Input Voltage	220-240Vac, 50/60Hz
Driver Output Voltage	27-40 Vdc
Driver Output Current	700/900/1000 mA
Power Factor	> 0.9
Electrical Classification	Class II
Surge Protection	Overload / Short Circuit

OTHERS

Body Material	Steel
Diffuser Material	Polycarbonate
Rebate Scheme Approvals	Not Applicable
Weight	1.65 kg
Dimensions	1195 x 295 x 34 mm