



# METEOR

## Commercial Downlights

  
**TRITONE**  
Colour  
Changeable

  
**DIM**  
Phase Cut  
Dimming

  
**IP54**  
Ingress  
Protection  
Rating

  
**50,000hr**  
Expected  
Lifetime

  
**5yr**  
Warranty

### Sleek, low glare design.

METEOR is a surface mounted tubular downlight with a recessed clear lens and multifaceted specular reflector, which provides optimum glare control. It is ideal for architectural indoor and outdoor applications.

### Features

- Tritone selectable
- 3 wattages and sizes
- IP54 ingress protection
- Recessed multifaceted reflector
- Phase-cut dimmable driver
- Twist, screw lock system and push button terminals

### Benefits

- Reduced SKUs and inventory levels
- Versatile to suit a large variety of applications
- Suitable for outdoor use under awnings
- Superior glare reduction
- Enhanced comfort and energy saving
- Quick and easy installation

POWER	LUMENS	EFFICACY	CCT	CUTOUT	WEIGHT	FASCIA	SAP CODE	PRODUCT CODE
13W	900 lm	65 lm/W	3000K	-	860g	White Black	2002198	<b>M13W90R-WH-TRI</b>
	1100 lm	85 lm/W	4000K				2002199	<b>M13W90R-BK-TRI</b>
	1050 lm	80 lm/W	5000K					
20W	1480 lm	70 lm/W	3000K	-	1.27kg	White Black	2002200	<b>M20W130R-WH-TRI</b>
	1740 lm	85 lm/W	4000K				2002201	<b>M20W130R-BK-TRI</b>
	1650 lm	75 lm/W	5000K					
35W	4000 lm	110 lm/W	3000K	-	2.1kg	White Black	2002246	<b>M35W160R-WH-3K</b>
			4000K				2002247	<b>M35W160R-BK-3K</b>
	4000 lm	110 lm/W	4000K			White Black	2002202	<b>M35W160R-WH-4K</b>
			4000K				2002203	<b>M35W160R-BK-4K</b>

WH = White BK = Black

### SPECIFICATIONS

<b>Body Material:</b>	Aluminium	<b>Driver:</b>	Integral
<b>Diffuser Material:</b>	Polycarbonate (Clear)	<b>Power Connection:</b>	Push Button Terminals
<b>Reflector:</b>	Multifaceted	<b>Input:</b>	220-240V, 50/60Hz
<b>Fascia colour:</b>	White: RAL 9010 Black: RAL 9005	<b>Electrical Classification</b>	Class 2
<b>IP Rating:</b>	Front: IP54 Body: IP54	<b>Power Factor:</b>	>0.9
<b>Beam Angle:</b>	13W: 45° 20W: 60° 35W: 65°	<b>Protection:</b>	Overload / Short Circuit
<b>CRI:</b>	>80 (>90 option)	<b>Lifespan:</b>	>50,000hrs @Ta25°C (L70)
<b>SDCM:</b>	<5 (<3 option)	<b>Operating Ambient Temperature:</b>	-20 to 45°C
		<b>Smart:</b>	KASTA Compatible
		<b>Dimming:</b>	Phase-Cut Dimmable (Trailing Edge)

### APPLICATIONS

Retail  
Cafes  
Restaurants  
Hotels  
Bathrooms



13W White



13W Black



20W White



20W Black




35W White



35W Black

### DIMENSIONS

Product Code:	M13W90R-*-TRI	M20W130R-*-TRI	M35W160R-*-K
<b>Diameter:</b>	Ø90mm	Ø130mm	Ø160mm
<b>Height:</b>	116mm	135mm	168mm

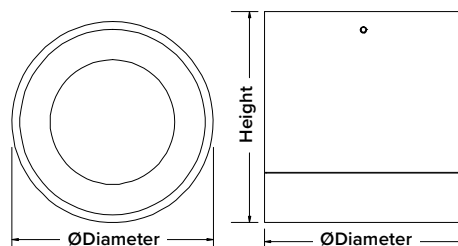

FIND OUT MORE:

