

NUMANA


Robust Illumination with Refined Performance

The NUMANA is built for demanding environments where durability and clarity are paramount. With 3CCT selectable colour (3000K/4000K/5000K), a wide 90° beam, and CRI >90, it delivers natural, uniform light that enhances every space. Designed with an IP65 rating for water resistance and an IK10 impact rating for maximum toughness, NUMANA is engineered to withstand harsh conditions without compromising performance.


Power	Lumen Output	CCT	Cutout	Dimming	IP Rating	IC Rating	Operating Ambient Temp.	Warranty
25W	2750 lm	3000 / 4000 / 5000 K	Ø 150 mm	Phase-Cut Dimmable (Trailing Edge,	IP65		-20 to 45 °C	5 yrs

Product code: NUM25W834590-WH
SAP CODE: 400372

PHOTOMETRIC DIAGRAM

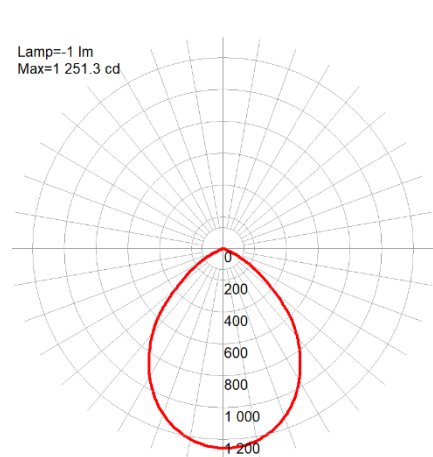

Dimensions: Ø 172 x 69 mm

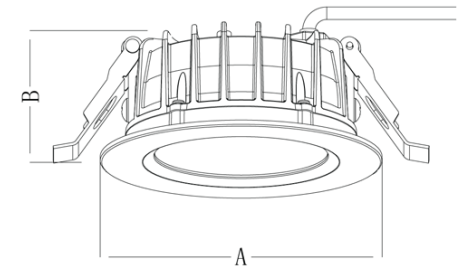

ELECTRICAL

Input Voltage	220-240Vac, 50/60Hz
Power Factor	> 0.90
Electrical Classification	Class II
Flicker-Free	Yes

OTHERS

Body Material	Aluminium
Diffuser Material	Polycarbonate
Cable Entry	Not Applicable
Weight	0.79 kg

Application: Accent / Display / Feature Lighting, Boardroom / Meeting Rooms, Butler Pantry, Cocktail Lounges, Dining Area, Ensuite, Entrances, Function Areas, Hotel Common Areas, Hotel Rooms, Offices, Restaurants / Cafes, Retail Spaces, Showrooms