



NUMANA

Robust Illumination with Refined Performance


The NUMANA is built for demanding environments where durability and clarity are paramount. With 3CCT selectable colour (3000K/4000K/5000K), a wide 90° beam, and CRI >90, it delivers natural, uniform light that enhances every space. Designed with an IP65 rating for water resistance and an IK10 impact rating for maximum toughness, NUMANA is engineered to withstand harsh conditions without compromising performance.

Power	Lumen Output	CCT	Cutout	Dimming	IP Rating	IC Rating	Operating Ambient Temp.	Warranty
35W	3650 lm	3000 / 4000 / 5000 K	Ø 200 mm	Phase-Cut Dimmable (Trailing Edge,	IP65		-20 to 45 °C	5 yrs

Product code: NUM35W834590-WH

SAP CODE: 400373

PHOTOMETRIC DIAGRAM

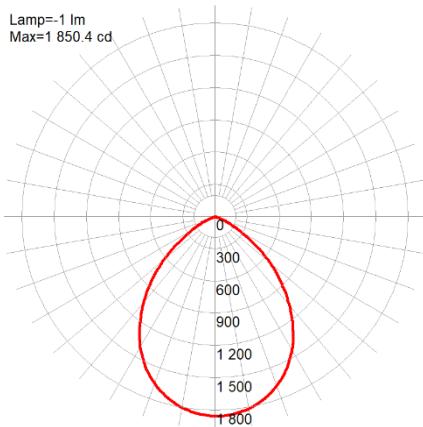

ELECTRICAL


Dimensions: Ø 235 x 81 mm

Input Voltage 220-240Vac, 50/60Hz

Power Factor > 0.90

Electrical Classification Class II

Flicker-Free Yes

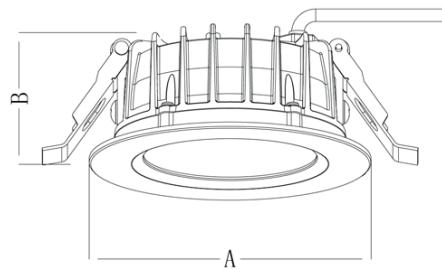

OTHERS

Body Material Aluminium

Diffuser Material Polycarbonate

Cable Entry Not Applicable

Weight 1.27 kg

Application: Accent / Display / Feature Lighting, Boardroom / Meeting Rooms, Butler Pantry, Cocktail Lounges, Dining Area, Ensuite, Entrances, Function Areas, Hotel Common Areas, Hotel Rooms, Offices, Restaurants / Cafes, Retail Spaces, Showrooms