



OVOLO

Commercial Downlights



2POWER
Switchable
Modes



TRITONE
Colour
Changeable



IP63
Ingress
Protection
Rating



CLASS II
Double Insulated



50,000hr
Expected
Lifetime



5yr
Warranty

Impressive, classic and all-purpose.

OVOLO series combines practical functionality with impressive features. This ultra lightweight downlight comes in a range of sizes which allows for direct replacement of compact fluorescent and metal halide products.

Features


- Tritone colour changeable
- Power switchable
- Dimmable driver
- Recessed diffuser
- Choice of sizes to choose from
- Painted aluminium housing
- High ambient temperature rating (>40°C)
- Optional DALI model available

Benefits

- Provides the choice of light hues from a single luminaire
- Adjust the light to suit the requirements
- Adjustable brightness to improve comfort
- Minimises glare and enhancing visual comfort
- Adaptable to suit various requirements
- Enhances the premium look and feel
- Long lasting in hot environments
- Designed to integrate into a larger ecosystems

POWER	LUMENS	EFFICACY	CCT	CUTOUT	WEIGHT	SAP CODE	PRODUCT CODE
10W	1037 / 1186 / 1115 lm	Up to 113 lm/W	3000K/4000K/ 5700K	Ø120mm	0.33kg	2002310	OVL145R-DIM
14W	1348 / 1554 / 1457 lm						
13W	1435 / 1619 / 1549 lm	Up to 119 lm/W	3000K/4000K/ 5700K	Ø135mm	0.35kg	2002311	OVL165R-DIM
18W	1767 / 1994 / 1908 lm						
15W	1309 / 1484 / 1405 lm	Up to 120 lm/W	3000K/4000K/ 5700K	Ø160mm	0.42kg	2002312	OVL200R-DIM
20W	1805 / 2050 / 1933 lm						
23W	2148 / 2479 / 2332 lm	Up to 120 lm/W	3000K/4000K/ 5700K	Ø195mm	0.56kg	2002313	OVL230R-DIM
30W	2823 / 3273 / 3073 lm						
27W	2800 / 3150 / 3000 lm	Up to 119 lm/W	3000K/4000K/ 5700K	Ø235mm	0.80kg	2002423	OVL275R-DIM
40W	4200 / 4700 / 4550 lm						

SPECIFICATIONS	
Body Material: Aluminium	Driver: Remote
Diffuser Material: Polycarbonate (Opal)	Power Lead: 0.9m Flex & Plug
Body colour: White (RAL0916 + PANTONE Cool Gray 11C)	Input: 220-240V, 50/60Hz
IC Rating: IC-4 (OVL145R-DIM only)	Electrical Classification: Class II
IP Rating: IP63 (front face only)	Power Factor: >0.9
Beam Angle: 100°	Protection: Overload / Short Circuit
CRI: >80	Lifespan: >50,000hrs @Ta25°C (L70)
SDCM: <7	Operating Ambient Temperature: -20 to 45°C
	Smart: KASTA Compatible
	Dimming: Phase Cut (Trailing Edge) Dimmable
	APPLICATIONS
	Hallways
	Entrance
	Showroom
	Office
	Boardroom / Meeting Rooms
	Function Areas
	Education Facilities
	Food Courts
	Retail Spaces
	General Medical Facilities

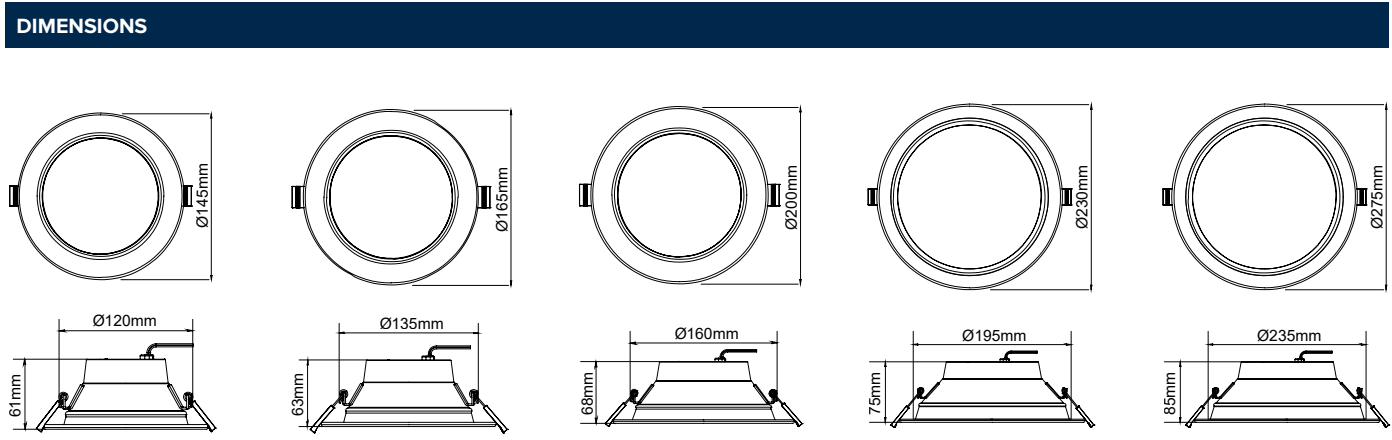

ALTERNATE DRIVERS

Haneco DALI and 0-10V Power Switchable Dimmable Drivers with Flex Plug and JST Connector

COMPATIBLE	SAP CODE	PRODUCT CODE
OVL14W145R	2002149	HDALI-45-JST-PS
OVL18W165R		
OVL20W200R	2002205	H10VD-25-JST-PS
OVL30W230R		

ACCESSORIES

OVL230R-DIM:

Adaptor Ring Ø280mm
(Cut Out Ø230-260mm)
TRIM-C2030-280-W
(SAP 2001219)

Adaptor Ring Ø310mm
(Cut Out Ø230-280mm)
TRIM-310-W
(SAP 2002222)

FIND OUT MORE:

