



OVOLO

Commercial Downlights

Impressive, classic and all-purpose.

The versatile OVOLO series combines practical functionality with impressive features. The IP rating of the OVOLO makes it a suitable all-rounder for a multitude of commercial applications. This ultra lightweight downlight comes in a range of sizes which allows for direct replacement of compact fluorescent and metal halide products.

Features

- Tritone colour selectable
- Power switchable
- Dimmable driver
- Recessed diuser
- Choice of sizes to choose from
- Painted aluminium housing
- High ambient temperature rating (>40°C)
- Optional DALI model available

Benefits

- Provides the choice of light hues from a single luminaire
- Adjust the light to suit the requirements
- Adjustable brightness to improve comfort
- Minimises glare and enhancing visual comfort
- Adaptable to suit various requirements
- Enhances the premium look and feel
- Long lasting in hot environments
- Designed to integrate into a larger ecosystems



Product Overview

POWER	LUMENS	EFFICACY	CCT	CUTOUT SIZE	WEIGHT	SAP CODE	PRODUCT CODE
10W	1037 / 1186 / 1115 lm	93 / 111 / 100 lm/W	3000K/4000K/ 5700K	Ø120 mm	0.40 kg	2002310 2002572	OVL145R-DIM OVL145R-DIM-BK
14W	1348 / 1554 / 1457 lm	93 / 113 / 100 lm/W					
13W	1435 / 1619 / 1549 lm	100 / 118 / 108 lm/W	3000K/4000K/ 5700K	Ø135 mm	0.50 kg	2002311 2002573	OVL165R-DIM OVL165R-DIM-BK
18W	1767 / 1994 / 1908 lm	100 / 119 / 109 lm/W					
15W	1309 / 1494 / 1405 lm	98 / 118 / 105 lm/W	3000 / 4000 / 5700K	Ø160 mm	0.60 kg	2002312 2002574	OVL200R-DIM OVL200R-DIM-BK
20W	1805 / 2050 / 1933 lm	99 / 120 / 106 lm/W					
23W	2148 / 2479 / 2332 lm	99 / 123 / 109 lm/W	3000 / 4000 / 5700K	Ø195mm	0.80 kg	2002313 2002575	OVL230R-DIM OVL230R-DIM-BK
30W	2824 / 3273 / 3073 lm	99 / 124 / 109 lm/W					
27W	2785 / 3158 / 3025 lm	100 / 119 / 109 lm/W	3000 / 4000 / 5700K	Ø230 mm	0.90 kg	2002423 2002576	OVL275R-DIM OVL275R-DIM-BK
40W	4072 / 4619 / 4433 lm	101 / 120 / 110 lm/W					

SPECIFICATIONS

Body Material:	Aluminium	CRI:	>80	Operating Ambient Temperature:	-20 to 45 °C
Diffuser Material:	Polycarbonate (Opal)	Driver:	Remote	Smart:	KASTA Compatible
Fascia Colour:	White Black	Power Lead:	0.9m Flex & Plug	Dimming:	Phase-Cut Dimmable (Trailing Edge) (10-100%) DALI, 0/1-10V, and DSI dimming available
IP Rating*:	IP63	Input:	220-240 V, 50 / 60 Hz		
IC Rating:	IC-4 (only the OVL145R-DIM/ OVL145R-DIM-BK)	Electrical Classification:	Class II		
SDCM:	<5	Power Factor:	> 0.9		
		Protection:	Overload / Short Circuit		
		Lifespan:	>50,000hrs @ Ta25 ° (L70)		

*IP Rating is from below only


ALTERNATIVE DRIVER

MODEL	PHASE CUT DIMMABLE (FOR REPLACEMENT)	0/1-10V DIMMABLE	DALI DIMMABLE
OVL145R-DIM OVL145R-DIM-BK	HD-15-JST-PS (SAP 2002159)	H10VD-25-JST-PS (SAP 2002205)	HDALI-25-JST-PS (SAP2002299)
OVL165R-DIM OVL165R-DIM-BK	HD-25-JST-PS (SAP 2002160)	H10VD-25-JST-PS (SAP 2002205)	HDALI-25-JST-PS (SAP2002299)
OVL200R-DIM OVL200R-DIM-BK	HD-25-JST-PS (SAP 2002160)	H10VD-25-JST-PS (SAP 2002205)	HDALI-25-JST-PS (SAP2002299)
OVL230R-DIM OVL230R-DIM-BK	HD-30-JST (SAP 2002161)	H10VD-45-DC-PS (SAP 2002208)	HDALI-45-JST-PS (SAP2002149)
OVL275R-DIM OVL275R-DIM-BK	HD-30-JST (SAP 2002161)	H10VD-45-DC-PS (SAP 2002208)	HDALI-45-JST-PS (SAP2002149)

APPLICATIONS

Awnings Bathrooms Boardroom Meeting Rooms Education Facilities Entrance Food Courts Function Areas Medical Facilities Hallways	Offices Retail Spaces Showrooms Staircase
---	--

DIMENSIONS

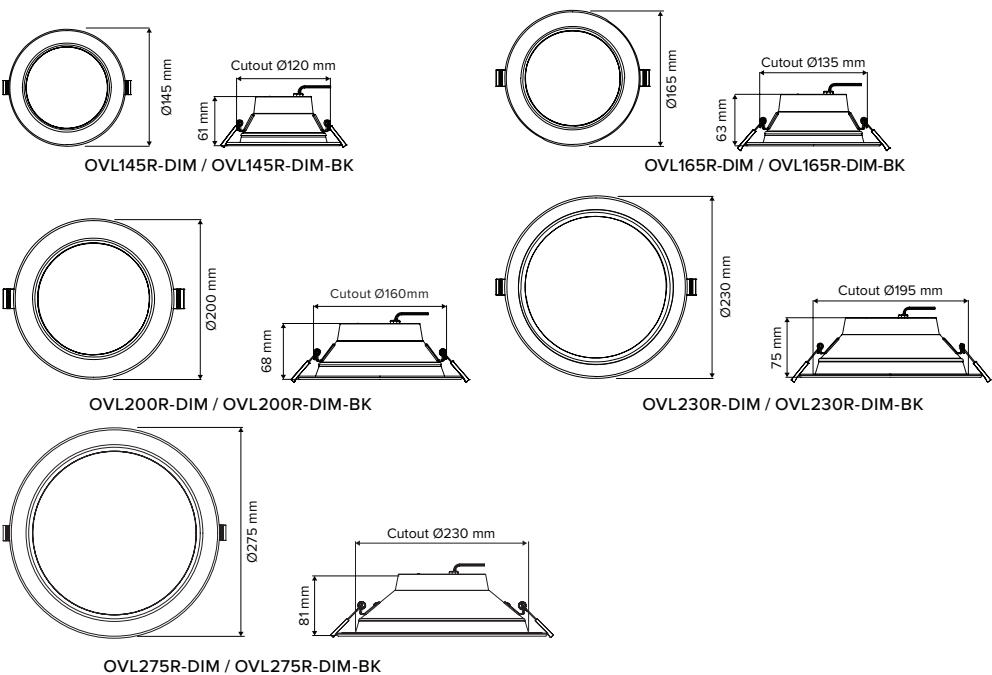

ACCESSORIES

280mm Adaptor Ring
TRIM-C2030-280-W
(SAP 2001219)
Compatible with
OVL230-DIM
OVL230-DIM-BK



310mm Adaptor Ring
TRIM-310-W
(SAP 2002222)
Compatible with
OVL230-DIM
OVL230-DIM-BK

