


OXFORD

OXFORD12
SAP CODE: 2001885

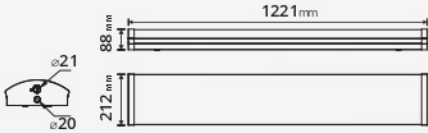


210mm Extra wide,
Tritone LED batten,
Flicker-free driver with
four power settings

OXFORD is an extra wide body batten with aesthetically pleasing and low glare design to minimize clutter on the ceiling for a wide variety of applications.



Photometric
Diagram



Unit: cd
- C0/180 120 deg
- C90/270 120 deg

KEY INFORMATION

| | | |
|-------------------------|-----|----------------------|
| Lumen Output | 40W | 4200 / 4400 / 4200lm |
| | 32W | 3620 / 3470 / 3440lm |
| | 29W | 3140 / 3280 / 3130lm |
| | 20W | 2200 / 2300 / 2200lm |
| Input Power | | 40W, 32W, 29W, 20W |
| Hole Cutout Size | | N/A |
| Install | | SURFACE MOUNT |
| Dimming Options | | Non-Dimmable |
| Fitting Colour | | WHITE |
| Warranty | | 5yr |
| IP Rating | | IP20 |
| IK Rating | | N/A |
| IC Rating | | N/A |
| Rebate Scheme Approvals | | N/A |

PHOTOMETRIC

| | | |
|------------|-----|---------------------|
| Efficacy | 40W | 105 / 110 / 105lm/W |
| | 32W | 113 / 108 / 108lm/W |
| | 29W | 108 / 113 / 108lm/W |
| | 20W | 110 / 115 / 110lm/W |
| LED | | SMD |
| CCT | | 4000 / 4700 / 5700K |
| CRI | | >80 |
| Beam Angle | | 120° |

ELECTRICAL

| | | |
|-----------------------------|--|-------------------|
| Driver | | Integral |
| Supply Input | | 220-240V, 50/60Hz |
| Driver Output Voltage | | 58VDC |
| Power Factor | | >0.9 |
| LED Input Current (nominal) | | 350-700mA |
| Useful life @Ta25° (L70) | | 50,000hr |

CONSTRUCTION

| | | |
|---------------------------|--|------------------------|
| Housing | | Steel |
| Optics | | Polycarbonate Diffuser |
| Adjustable Angle | | N/A |
| Fixings/Hardware | | Mounting Screws |
| Connection Type | | Terminal Block |
| Total Weight | | 3.55kg |
| Dimensions | | 1238 x 212.7 x 88.7mm |
| Operating Ambient Temp. | | -20 to 50°C |
| Electrical Classification | | Class 1 |