



# OXFORD

## Indoor Battens



**4POWER**  
Switchable  
Modes



**TRITONE**  
Colour  
Changeable



**IP20**  
Ingress  
Protection  
Rating



**YES**  
Gov  
Rebate



**50,000hr**  
Expected  
Lifetime



**5yr**  
Warranty

### Aesthetically pleasing, low glare design.

OXFORD is an extra wide LED batten with an aesthetically pleasing, low glare design and premium appearance. With dedicated 4000K high quality LED chips, SDCM rating of <2 and flicker-free drivers, OXFORD provides increased visual comfort making it ideal in any office or classroom.

### Features

- Tritone selectable
- Low glare design
- Flicker-free driver
- Emergency versions
- Sensor models

### Benefits

- Reduced SKUs and inventory levels
- Enhanced visual comfort
- Increased health and productivity
- Provides safety in case of power outages
- Supports power conservation

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE				
20W	2200 lm	110 lm/W	4000K	1221 x 212 x 88mm	3.55kg	2001885	<b>OXFORD12</b>				
	2300 lm	115 lm/W	4700K								
	2200 lm	110 lm/W	5700K								
29W	3140 lm	108 lm/W	4000K					4.00kg	2001886	<b>OXFORD12-EM</b>	
	3280 lm	113 lm/W	4700K								
	3130 lm	108 lm/W	5700K								
32W	3620 lm	113 lm/W	4000K		1221 x 212 x 88mm	3.60kg	2001887	<b>OXFORD12-MS</b>			
	3470 lm	108 lm/W	4700K								
	3440 lm	108 lm/W	5700K								
40W	4200 lm	105 lm/W	4000K						4.00kg	2001888	<b>OXFORD12-EM-MS</b>
	4400 lm	110 lm/W	4700K								
	4200 lm	105 lm/W	5700K								

EM = Emergency

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE
40W	4200 lm	105 lm/W	4000K	1221 x 212 x 88mm	3.60kg	2001887	<b>OXFORD12-MS</b>
	4400 lm	110 lm/W	4700K				
	4200 lm	105 lm/W	5700K				

EM = Emergency MS = Intellisensor

**SPECIFICATIONS**

<b>Body Material:</b> Steel	<b>Driver:</b> Integral
<b>Diffuser Material:</b> Polycarbonate (Opal)	<b>Power Connection:</b> PA14 Terminals
<b>Body colour:</b> White: W002	<b>Input:</b> 220-240V, 50/60Hz
<b>IP Rating:</b> IP20	<b>Electrical Classification:</b> Class 1
<b>Beam Angle:</b> 120°	<b>Power Factor:</b> >0.9
<b>CRI:</b> >80 (>90 option)	<b>Protection:</b> Overload / Short Circuit
<b>SDCM:</b> <5 (<3 option)	<b>Lifespan:</b> >50,000hrs @Ta25°C (L70)
	<b>Operating Ambient Temperature:</b> -20 to 50°C
	<b>Dimming:</b> Non-Dimmable


**APPLICATIONS**

Offices  
Retail  
Schools  
Colleges



Modern Curved Profile

**DIMENSIONS**

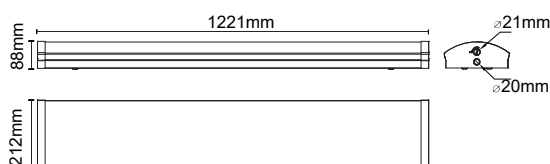

OXFORD12

FIND OUT MORE:

