



PARX^{G2}

Outdoor Floodlights

Powerfull all-round.

The **PARX G2** isn't just another floodlight - it's a lighting powerhouse designed to tackle any challenge. This versatile LED fixture boasts high-efficiency LEDs that deliver unmatched brightness, while the array of available optics ensures you get the perfect beam pattern for your specific needs. Built to last with robust construction, the PARX G2 also boasts a sleek aesthetic design that complements any environment. Let the PARX G2 illuminate your lighting requirements with ease and style.

Features

- Large power options
- Versatile mounting options
- IP65 and IK08 Rating
- Easily adjustable
- Asymmetric distributions
- Symmetric distributions (T4 Distribution)

Benefits

- Offering the right amount of light for the application;
- Expand the lighting possibilities with different mounting configurations;
- Ideal for outdoor applications;
- Simple installation and adjustability;
- The right amount of light for your application

* PARX300W-AS-4K has a projected lifespan of 96,000hrs



Product Overview

POWER	LUMENS	EFFICACY	CCT	WEIGHT	SAP CODE	PRODUCT CODE
15 / 75 W	12,103 lm	162 lm/W	4000 K	2.6 kg	2002380	PARX75W-AS-4K
100 / 150 W	24,504 lm	163 lm/W		4.4 kg	2002381	PARX150W-AS-4K
175 / 200 W	34,372 lm	171 lm/W		5.1 kg	2002382	PARX200W-AS-4K
225 / 250 W 275 / 300 W	49,456 lm	165 lm/W		6.0 kg	2002383	PARX300W-AS-4K

SPECIFICATIONS

Body Material: Diecast Aluminium (ADC12)

Diffuser Material: Polycarbonate

Body colour: BLACK (RAL 9005)

IK Rating: IK08

IP Rating: IP65

Beam Angle: 120° x 60°

CRI: > 80

SDCM: < 3

Driver: Integral

Power Lead: 2m Flex

Input: 220-240Va.c. 50/60Hz

Electrical Classification: Class I

Power Factor: > 0.9

Protection: Overload / Short Circuit

Lifespan: >100,000hrs@Ta50°C (L80)

Operating

Ambient Temperature: -40 to 50°C

Smart:

KASTA Compatible


Dimming: 0 - 10V Dimmable

APPLICATIONS

Side of Building
Carpark
Area Lighting
Outdoor Recreation
General Industrial
Sports Facility
Tennis Court

Outdoor Lighting

DIMENSIONS (mm)

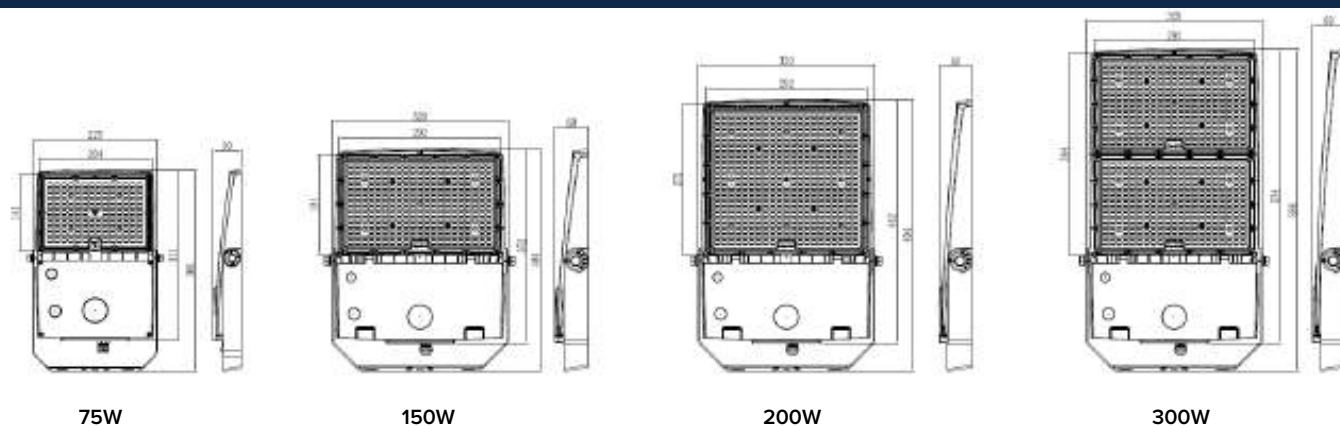

Accessories

Lens

Description	Product Code
75W T3 Lens	PARX75W-LENS-T3
150W T3 Lens	PARX150W-LENS-T3
200W T3 Lens	PARX200W-LENS-T3
300W T3 Lens	PARX300W-LENS-T3
75W Symmetric Lens	PARX75W-LENS-SM
150W Symmetric Lens	PARX150W-LENS-SM
200W Symmetric Lens	PARX200W-LENS-SM
300W Symmetric Lens	PARX300W-LENS-SM

Adaptor & Bracket

Description	Product Code
60mm Spigot Adaptor	PARX-SPIGOT
76mm OD Adjustable Spigot	PARX-ADJ-SPIGOT
4-Way 76mm OD Pole Adaptor	PARX-HUB
60mm OD Square Pole Adaptor for Post top mounting	PARX-HUB-RND
Adjustable Bracket to suit PARX HUB	PARX-ADJ-SQBKT
Pole U Bracket	PARX-UBKT

Shield

Description	Product Code
75W Spill Light Shield	PARX75W-SHIELD
150W Spill Light Shield	PARX150W-SHIELD
200W Spill Light Shield	PARX200W-SHIELD
300W Spill Light Shield	PARX300W-SHIELD

