





PARX

PARX200W-ASYM

SAP CODE: 2000851

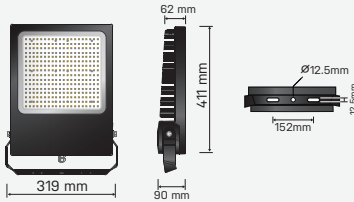

Photometric Diagram



Unit: cd
 - C0/180 55.0deg
 - C90/270 100.0deg

KEY INFORMATION

Lumen Output	24710lm
Input Power	200W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	BLACK
Warranty	3yr
IP Rating	IP65
IK Rating	IK09
IC Rating	N/A
Rebate Scheme Approvals	IPART; REES LCP 201.26

PHOTOMETRIC

Efficacy	124lm/W
LED	SMD
CCT	5000K
CRI	>85
Beam Angle	100°x66°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	56VDC
Power Factor	>0.9
LED Input Current (nominal)	3200mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Aluminium 1070
Optics	Polycarbonate Diffuser
Adjustable Angle	0-180°
Fixings/Hardware	Mounting Bracket
Connection Type	1.2m Flex
Total Weight	7.8kg
Dimensions	411x319x90mm
Operating Ambient Temp.	-30 to 50°C
Electrical Classification	Class 1

200W, high powered LED floodlight

Powerful LED floodlight with asymmetric lens to minimise light spillage.

Accessories

GLARE SHIELD; POLE MOUNT; TENON MOUNT; WIREGUARD