

# Solar Panel

## User Guide


Model: PV200

Contact Us:  
www.bluettipower.com  
service@bluettipower.com




### User Guide

#### What is in the box

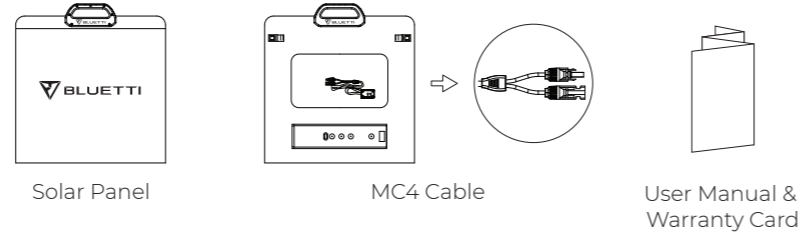


#### How to use


##### 1 Unfold

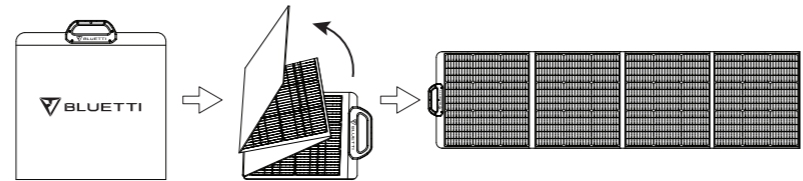

##### 2 Adjust the kickstand

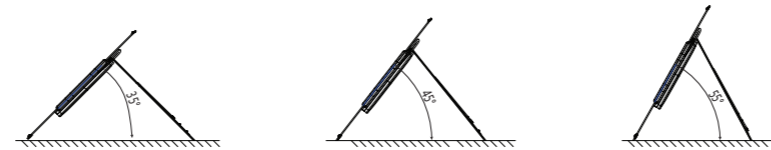

##### 3 Connect to power station

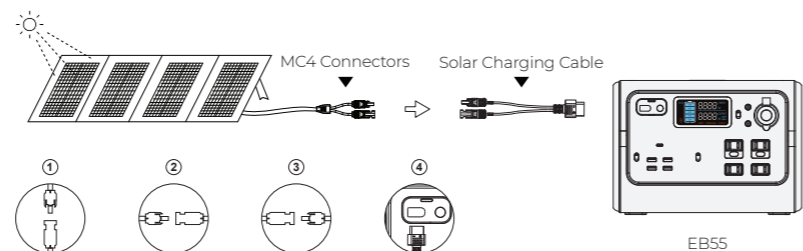

#### Note:

Use ONLY ONE PV200 solar panel with EB3A,EB55.  
Whether connected in series or parallel, make sure the total voltage of solar panels is under the power station's input voltage limit.

#### Attention

Regular inspection and maintenance are required to prolong the lifespan of solar panels.



#### Warning:

Do not use solar panels in extreme weather conditions like thunderstorms, floods, typhoons, etc.  
Always use solar panels within the specified temperature range (14-149°F/-10-65°C).

#### Technical details

PV200		
Maximum Power(Pm)	200W*	
Solar Cell Lamination	ETFE	
Cell Efficiency	Up to 23.4%	
Voltage at Max Power(Vmp)	20.5V	
Current at Max Power(Imp)	9.7A	
Open Circuit Voltage(voc)	26.1V	
Short Circuit Current(Isc)	10.3A	
Operating Temperature	-10°C~+65°C	
Best Working Temperature	+25°C	
Folding Number	4	
General		
Weight	16.1lbs / 7.3Kg	
Dimensions	Unfolded	23.2*89.2in / 590*2265mm
	Folded	23.2*24.8in / 590*630mm
Warranty		
12 Months		

### User Guide

\*STC: Irradiation 1000W/m<sup>2</sup>, cell temperature 25°C, atmospheric mass number AM 1.5, measurement tolerance ±3 % (Pm).

#### Frequently asked questions

##### Is the solar panel waterproof ?

No. The solar panel is IP65 water-resistant that provides protection against water splash. Please do not leave it in the rain or water for a long time.

##### What will affect the final conversion efficiency of solar panels ?

The actual solar panel efficiency may be affected by several factors, like weather, sun intensity, shading, panel orientation, temperature, location, dust and dirt. For example, if you live in a place without much sunlight or your panels are covered by shade, you'll get a very low output or none at all.

##### Is the BLUETTI' s solar panel compatible with the third party' s power station ?

Yes. Make sure BLUETTI solar panels' voltage is compatible with your power stations' voltage limit, while you're using the same connector. Please feel free to contact us for compatibility with other power stations.



Company: POWEROAK GmbH  
Address: Lindwurmstr. 114, 80337 München Germany  
Mail: logi@bluetti.de



Company: POWEROAK ENERGY UK CO.,LTD  
Address: Unit 2, NorthGate, Bolsover Business Park, Woodhouse Lane Chesterfield England S44 6BD  
Mail: poweroak.eu@bluetti.com



#### Sales Contact



#### HANECOXERO

262 Marion Road, Netley, SA 5037 Australia  
1300 001 533  
info@haneco.com.au