

# SENTURA Sensor

SEN-DSK2DWN-IP-G



## PE CELL SENSOR IP66 DUSK 2 DAWN W/ TIMER GREY


### FEATURES

- Suitable for all commercial and residential installations
- Weatherproof rating IP66
- Multiple side and back cable entries: Ø 25mm
- Low standby power consumption < 1W
- Surface mount
- Easy to install. Retrofittable to HPM PE170/10 bases.
- Adjustable LUX, Time settings
- Control up to Max. 250W LED
- 5 year warranty

### SPECIFICATIONS

|                               |                                                |
|-------------------------------|------------------------------------------------|
| Power Supply                  | 220-240V a.c. 50Hz                             |
| Operating Ambient Temperature | -10 to 40°C                                    |
| Operating Humidity            | <93% RH                                        |
| IP Rating                     | IP66                                           |
| Connection Type               | Fly Leads                                      |
| Rated Load                    | Max. 1000W (incandescent) /<br>Max. 500W (LED) |
| Time Delay                    | 1,2,3,4,5,6,7,8,9 Hours                        |
| Ambient Light Control         | <3-500 LUX (adjustable)                        |
| Standby Power                 | <0.5W                                          |
| Standards Complied            | AS/NZS 60669.1<br>AS/NZS 60669.2.1             |

### CONNECTION

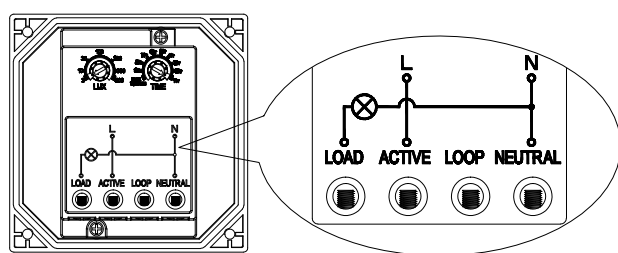

### DIMENSIONS

