


SENTURA Sensor

SEN-PIR360SM-W



PIR MOTION SENSOR 360° SURFACE MOUNT W/ OVERRIDE


FEATURES

- 360° field of view, with detection range 16 metre diameter
- Advanced resolution for detection of small movements
- Ceiling surface mounted with in-built wiring box
- In-built manual override ON feature
- Adjustable LUX, Time, Sensitivity settings
- Control up to Max. 1000W LED
- 5 year warranty


SPECIFICATIONS

Power Supply	220-240V a.c. 50Hz
Operating Ambient Temperature	-10 to 40°C
Operating Humidity	<93% RH
IP Rating	IP20
Connection Type	Terminals
Rated Load	Max. 2000W (incandescent) / Max. 1000W (LED)
Detection Angle	360°
Detection Range	Up to 16m (<24°C)
Installation Height	2.2 - 4m
Time Delay	10 sec (±3s) to 15 min (±2min)
Ambient Light Control	<10-2000 LUX (adjustable)
Standby Power	<0.5W
Standards Complied	AS/NZS 60669.1 AS/NZS 60669.2.1

CONNECTION

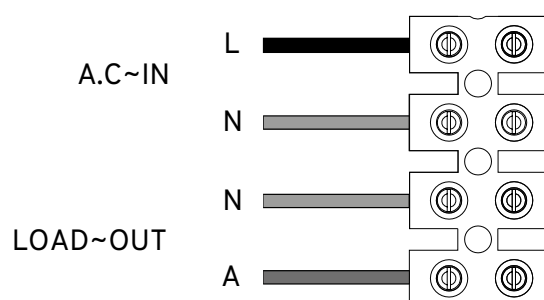

DIMENSIONS

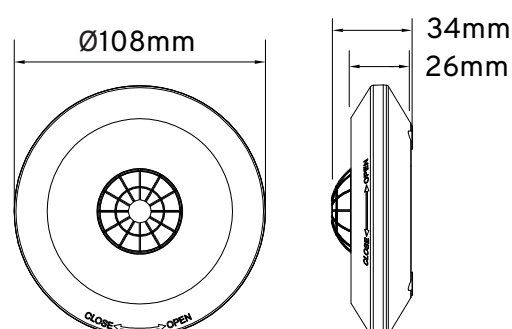

DETECTION AREA

