

SENTRY

SENTRY12W06-TRI

SAP CODE: 2001495

Vandal proof and secure.


SENTRY is a sturdy and vandal proof security fitting. It features a robust polycarbonate body and diffuser, designed to withstand the toughest environments.

SENTRY is ideal for public areas, schools and community centres.

APPLICATIONS

Side of Building, Manufacturing Facilities, Public Facilities, Indoor Recreation, Area Lighting

DIMENSION DIAGRAMS

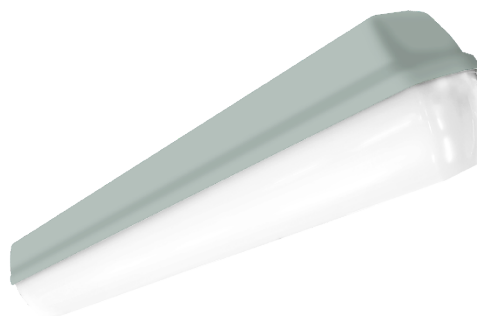

KEY INFORMATION

Power	12 W
Lumen Output	1010 / 1225 / 1201 lm
Mounting Type	Surface Mount
Dimming Type	Non-Dimmable
Fascia Colour	White
IP Rating	IP66
IK Rating	IK10
Operating Ambient Temp.	-15 to 45°C
Connection Type	PA14 Terminals
Driver	Integral
Warranty	3 yrs

PHOTOMETRIC

Efficacy	84 / 102 / 100 lm/W
CCT	2700 / 4000 / 6500 K
CRI	> 80
SDCM	
UGR	> 25
Beam Angle	120°
Flicker-Free	Yes
Projected Lifespan	>36,000hr @ Ta 25°C (L70)

ELECTRICAL

Input Voltage	220-240Vac, 50/60Hz
Power Factor	> 0.9
Electrical Classification	Class I
Surge Protection	Overload / Short Circuit

OTHERS

Body Material	Polycarbonate
Diffuser Material	Polycarbonate (Opal)
Cable Entry	Rear
Rebate Scheme Approvals	IPART;
HACCP Approval	No
Weight	2.0 kg
Dimensions	675 x 96 x 116 mm