

# SKYLUX<sup>EVO</sup> Highbays













Switchable Modes Colour Temperature Beam Ingress Angle Protection Rating Projected Lifespan Warranty

Sleek and powerful.

**SKYLUX EVO** is a power switchable LED highbay, suitable for many commercial and industrial applications with high ceilings, and a need for high visibility and effective productivity.

### **Features**


- Flicker-free driver
- Power switchable
- Exceptional performance
- Diecast aluminium construction
- Integrated driver with cable and plug
- · Various accessories available
- · Easily adjustable

### **Benefits**

- Increase productivity and lowers eye strain
- Adjust the light to suit the requirements
- High efficacy rating to promote energy saving
- Improved thermal characteristics for heavy duty applications
- Provides quick and easy installation
- Tailor the luminaire to meet the application requirements
- Simple installation and adjustability

# SKYLUXEVO

# **Product Overview**

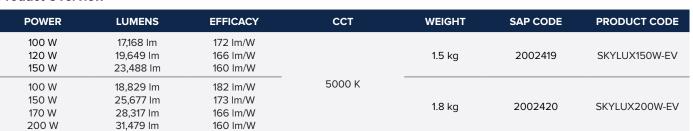

SPECIFICATIONS	
Body Material:	Diecas

Body Material:	Diecast Aluminium	
Diffuser	Polycarbonate (Clear)	
Material:		
Body colour:	Black	
IK Rating:	IK08	
IP Rating:	IP65	
Beam Angle:	120°	
CRI:	> 70	
SDCM:	< 5	
UGR:	< 32	

Driver:	Integral	
Connection Type	1.5m Rubber Flex & Plug	
Input:	220-240Va.c. 50/60Hz	
Electrical	Class I	
Classification:		
Power Factor:	> 0.9	
Protection:	Overload / Short Circuit	
Lifespan:	>54,000hrs @ Ta 25°C (L70)	
Operating		
Ambient	-30 to 50°C	
Temperature:		
Smart:	KASTA Compatible	


Dimming: 0 - 10V Dimmable


## **APPLICATIONS**

Warehouse Storage Facilities Manufacturing Facilities Cool Rooms General Industrial


**HANECO** 


# **DIMENSIONS (mm)**





150 W





200 W

#### **Accessories**

Description	Product Code
Microwave Motion Sensor	SKYLUX-G5/EV-MS
Sensor Remote Controller	HIGHBAY-REMOTE
Surface Mount Bracket	SKYLUXG4-BRKT
DALI Converter	HBAY-DALI-CONV







SKYLUXG4-BRKT





