



Sleek
and
Tough


PLUG-IN
Sensor




POWER
Switchable
Modes

SKYLUX^{LINEAR}

Highbay

100/150/200W LED Linear Highbay



SKYLUX^{LINEAR} is high-performance linear LED highbay range designed for efficient illumination in industrial and commercial spaces. With dedicated beam angle options and flexible mounting solutions, it delivers optimised lighting for both wide open areas and narrow aisle applications.

Features

- IP65 and IK10 rating
- Optional beam angle lens available
- Versatile mounting options
- Various accessories available
- Optional plug in motion sensor
- Aluminium construction
- Integrated driver with cable and plug
- High ambient temperature rating (-35°-50°C)
- Power Switchable
- Flicker Free

Benefits

- Ideal for outdoor applications.
- Easily customise beam distribution to suit specific applications
- Adjustable light output ensures optimal illumination for varying application needs.
- Improved thermal characteristics for heavy duty applications.
- Long lasting in hot environments.
- Tailor the luminaire to meet the application requirements.
- Enhances visual comfort and reduced eye strain.

*From below only

Product Overview

POWER	CCT	LUMENS	EFFICACY	WEIGHT	SAP CODE	PRODUCT CODE
100W	4000 K	16,408 lm	165 lm/W	3.1kg	2002717	SKYLUX200W4K-LIN
150W	4000 K	24,132 lm	161 lm/W			
200W	4000 K	30,197 lm	153 lm/W			


* Measured at 120° beam angle

*Optional Models can be ordered (MOQ may apply)

DIMENSIONB	EAM ANGLEP	OWER	CCT	SAP CODE	PRODUCT CODE
106X79X1130mm	30° x 70°	100/150/200W	4000 K	2002757	SKYLUX200W4K-LIN-S
106X79X1130mm	40° x 120°	100/150/200W	5000 K	2002758	SKYLUX200W5K-LIN
106X79X1130mm	30° x 70°	100/150/200W	5000 K	2002759	SKYLUX200W5K-LIN-S
106X79X1390mm	40° x 120°	150/200/240W	4000 K	2002760	SKYLUX240W4K-LIN
106X79X1390mm	30° x 70°	150/200/240W	4000 K	2002761	SKYLUX240W4K-LIN-S

SPECIFICATIONS				APPLICATIONS	
Body Material:	Aluminium	Driver:	Integral	Storage Facilities Manufacturing Facilities General Industrial Warehouses	
Diffuser Material:	Polycarbonate	Connection Type	1.5m Flex & Plug		
Body colour:	Black RAL9004	Input:	100-240V, 50/60Hz		
IK Rating:	IK10	Electrical Classification:	Class I		
IP Rating:	IP65	Power Factor:	> 0.9		
Beam Angle:	40° x 120°	Protection:	Overload / Short Circuit		
CRI:	> 80	Lifespan:	>102,000hrs @ Ta 25°C (L80)*		
SDCM:	<5	Operating Ambient Temperature:	-30 to 50°C		
Flicker-Free:	Yes	Smart:	KASTA Compatible		
Warranty:	5 years				
Dimming:	0 - 10V Dimmable				
*Based on rated LED design life					

*Based on rated LED design life

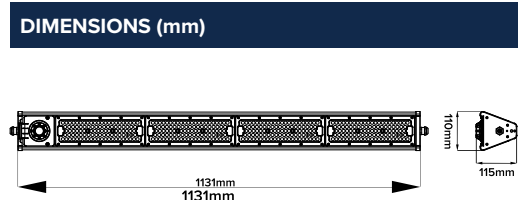

ACCESSORIES	PRODUCT CODE
30° x 70° Bean Angle Lens	SKYLUX-LN-30x70L
Suspension Kit	SKYLUX-LN-WSKIT
Straight Bracket for Connecting 2 Skylux Linear	SKYLUX-LN-STBKT
Remote Control of Sensor	HIGHBAY-REMOTE
DALI to 0/1-10V Signal Convertor IP65	HANECO-DC
Microwave Sensor	SKYLUX-G5/EV-MS

Highbays and Lowbays

