

POWER	CCT	LUMENS	EFFICACY	WEIGHT	SAP CODE	PRODUCT CODE
100W	4000 K	16,408 lm	165 lm/W	3.1kg	2002717	SKYLUX200W4K-LIN
150W	4000 K	24,132 lm	161 lm/W			
200W	4000 K	30,197 lm	153 lm/W			


*Optional Models can be ordered (MOQ may apply)

DIMENSION	BEAM ANGLE	POWER	CCT	SAP CODE	PRODUCT CODE
106X79X1130mm	30° x 70°	100/150/200W	4000 K	2002757	SKYLUX200W4K-LIN-S
106X79X1130mm	40° x 120°	100/150/200W	5000 K	2002758	SKYLUX200W5K-LIN
106X79X1130mm	30° x 70°	100/150/200W	5000 K	2002759	SKYLUX200W5K-LIN-S
106X79X1390mm	40° x 120°	150/200/240W	4000 K	2002760	SKYLUX240W4K-LIN
106X79X1390mm	30° x 70°	150/200/240W	4000 K	2002761	SKYLUX240W4K-LIN-S

SPECIFICATIONS			
Body Material:	Aluminium	Driver:	Integral
Diffuser Material:	Polycarbonate	Input:	100-240Vac 50/60Hz
Body colour:	Black (RAL9004)	Electrical	Class I
IK Rating:	IK10	Classification:	
IP Rating:	IP65	Power Factor:	> 0.9
Beam Angle:	40° x 120°	Protection:	Overload / Short Circuit
CRI:	> 80	Lifespan:	>102,000hr @Ta45° (L80)*
SDCM:	< 5	Operating	-30 to 50°C
Warranty:	5 years	Temperature:	
Flicker-Free:	Yes	Smart:	KASTA Compatible
Connection Type:	1.5m Flex & plug	Dimming:	0-10V Dimmable

*Based on rated LED design life

DIMENSIONS (mm)

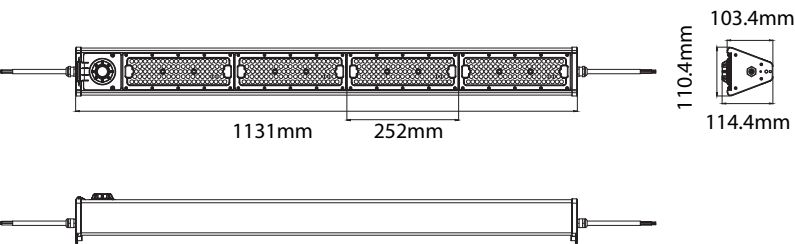

APPLICATIONS
Storage Facilities
Manufacturing Facilities
General Industrial
Warehouses

ACCESSORIES	PRODUCT CODE
30° x 70° Bean Angle Lens	SKYLUX-LN-30x70L
1.5m Suspension Kit	SKYLUX-LN-WSKIT
Straight Bracket for Connecting 2 Skylux Linear	SKYLUX-LN-STBKT
Remote Control of Sensor	HIGHBAY-REMOTE
DALI Converter	HANECO-DC
Motion Sensor	SKYLUX-G5/EV-MS

SALES OFFICE & WAREHOUSE

South Australia (Head Office) & Northern Territory
262 Marion Rd
Netley, SA 5037
Ph: 08 8297 6373

New South Wales & ACT
157 Orchardleigh St
Old Guildford, NSW 2161
Ph: 02 8999 1377

Queensland
72 Crockford St
Northgate, QLD 4013
Ph: 07 3123 5008
Fax: 07 3319 6170

Western Australia
Unit 4, 5 Spartan Street
Jandakot, WA 6164
(08) 6169 1600
Despatch enquiries only

Victoria & Tasmania
26-28 Bando Rd
Springvale, VIC 3171
Ph: 03 9008 6109

GENERAL ENQUIRIES
info@haneco.com.au
1300 001 LED (533)



Find out more



SKYLUX^{LINEAR}

Power Switchable LED Linear Highbay.



SKYLUX^{LINEAR} is high-performance linear LED highbay range designed for efficient illumination in industrial and commercial spaces. With dedicated beam angle options and flexible mounting solutions, it delivers optimised lighting for both wide open areas and narrow aisle applications.

Engineered for PRECISION LIGHTING

SKYLUX^{LINEAR} is a premium range of linear LED highbays engineered to provide efficient, reliable illumination for warehouses and industrial environments. Featuring a sleek, low-profile design, it offers dedicated beam angle options for both narrow and wide aisle applications, together with flexible mounting solutions to suit a wide range of installations.

Available in 200W and 240W configurations (240W made to order), SKYLUX LINEAR can be configured with a range of optional accessories, including:


- Plug-in microwave sensor
- Sensor remote controller
- Straight Bracket for Connecting two SKYLUX LINEAR
- Suspension kit
- 30° × 70° beam angle lens
- DALI converter

Backed by a 5-year warranty, **SKYLUX^{LINEAR}** is an ideal lighting solution for food industries, warehouses, manufacturing facilities, distribution centres, transport terminals, airport buildings, and other large commercial and industrial applications.

- ✓ **Features**


 - IP65 and IK10 rating
 - Optional beam angle lens available
 - Versatile mounting options
 - Various accessories available
 - Optional plug in motion sensor
 - Aluminium construction
 - Integrated driver with cable and plug
 - High ambient temperature rating (-35°-50°C)
 - Power Switchable
 - Flicker Free
- ✓ **Benefits**

 - Ideal for outdoor applications.
 - Easily customise beam distribution to suit specific applications
 - Adjustable light output ensures optimal illumination for varying application needs.
 - Improved thermal characteristics for heavy duty applications.
 - Long lasting in hot environments.
 - Tailor the luminaire to meet the application requirements.
 - Enhances visual comfort and reduced eye strain.

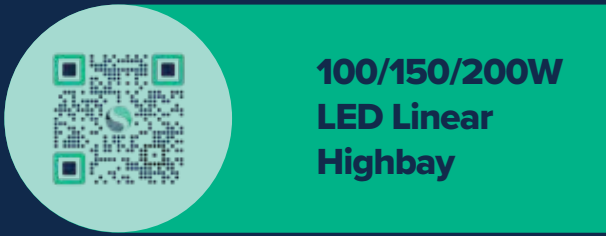

- POWER**
Switchable Modes
- >80**
CRI Colour Rendering
- Flicker**
Free
- IP65**
Ingress Protection
- IK10**
Impact Rating
- DIM**
0-10V Dimming
- PLUG-IN**
Sensor (not included)
- HACCP**
INTERNATIONAL Food Safe
- 5yr**
Warranty

*Based on rated LED design life

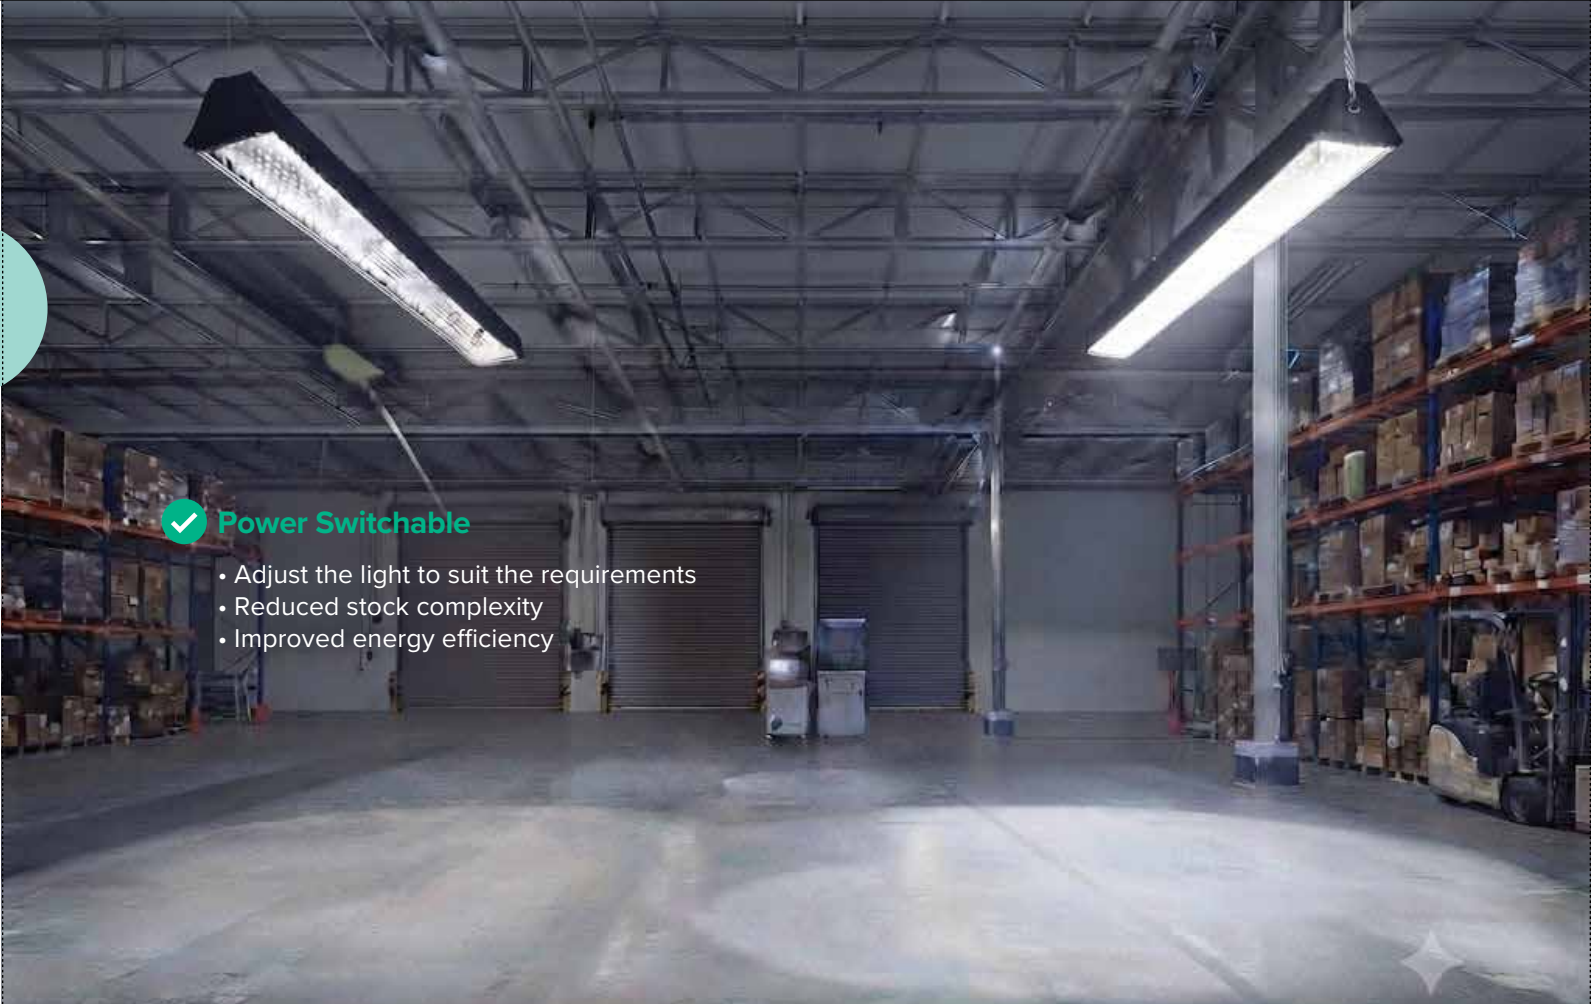

- ✓ **Power Switchable**
- Adjust the light to suit the requirements
 - Reduced stock complexity
 - Improved energy efficiency

Extreme PROTECTION

- ✓ **Built for Harsh Environments**
- IP65 weather protection against dust and water ingress
 - IK10 impact resistance for durability
 - Robust construction for long-term outdoor performance



Constructed from a robust die-cast aluminium housing, **SKYLUX^{LINEAR}** delivers excellent thermal performance for long-term reliability. Rated IP65 and IK10, it is designed to withstand demanding industrial environments. The luminaire can be installed as either a surface-mounted or suspended fitting, offering maximum installation flexibility.



- ✓ **Optional Motion Sensor & Remote Control**
- Optional accessories include the SKYLUX-G5/EV-MS microwave motion sensor with up to 12m detection range, and the HIGHBAY-REMOTE for sensor reprogramming. By detecting movement, they activate illumination only when needed, reducing energy costs and extending the life of your lighting system.

Remote Control
(Not include)



Multiple combinations of BEAM ANGLE & CCT

- ✓ **4000K / 5000K colour temperatures**

Choose between multiple colour temperatures to suit different environments and project specifications*.
- ✓ **30°x70° / 40°x120° beam angles**

Choose between multiple beam angles to suit different environments and project specifications*.



*Please see the reverse side for specifications. MOQ may apply

- ✓ **Multiple Accessories**
- Expand the lighting possibilities with different mounting configurations and accessories.

