

SKYLUX LINEAR

SKYLUX200W4K-LIN
SAP CODE: 2002717


Sleek and tough

SKYLUX LINEAR is high-performance linear LED highbay range designed for efficient illumination in industrial and commercial spaces. With dedicated beam angle options and flexible mounting solutions, it delivers optimised lighting for both wide open areas and narrow aisle applications.

APPLICATIONS


Warehouse, Storage Facilities, Storage Rooms, Indoor Recreation, Kitchen / Food Prep

DIMENSION DIAGRAMS

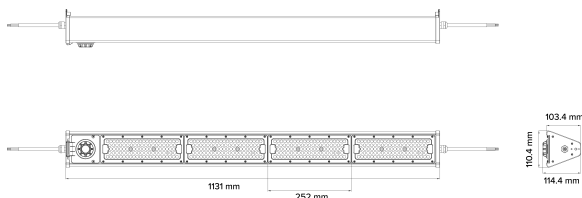

*Based on rated LED design life

PHOTOMETRIC DIAGRAM

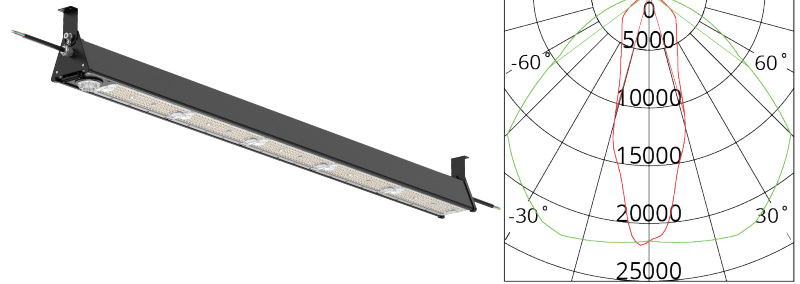

Unit: cd
- C0/180 31.9deg
- C90/270 106.6deg

KEY INFORMATION

Power	100 W 150 W 200 W
Lumen Output	100 W: 16408lm 150 W: 24132lm 200 W: 30197lm
Mounting Type	Surface mount / Suspended
Dimming Type	0-10V Dimmable
Body Colour	Black
IP Rating	IP65
IK Rating	IK10
Operating Ambient Temp.	-35 to 50°C
Connection Type	1.5m Flex & Plug
Driver	Integral
Warranty	5 yrs

PHOTOMETRIC

Efficacy	165 lm/W
CCT	4000 K
CRI	> 80
SDCM	< 5
UGR	N/A
Beam Angle	40° x 120°
Flicker-Free	Yes
Projected Lifespan	>102,000hrs @ Ta 25°C (L80)*

ELECTRICAL

Input Voltage	100-240V, 50/60Hz
Power Factor	> 0.9
Electrical Classification	Class I
Flicker-free	Yes
Surge Protection	Overload / Short Circuit

OTHERS

Body Material	Aluminium
Diffuser Material	PMMA (acrylic)
HACCP Approval	Yes
Weight	1.3 kg
Dimensions	1131 x 115 x 110 mm