



# SKYLUX LINEAR

**SKYLUX200W4K-LIN**  
SAP CODE: 2002717


## Sleek and tough

SKYLUX LINEAR is high-performance linear LED highbay range designed for efficient illumination in industrial and commercial spaces. With dedicated beam angle options and flexible mounting solutions, it delivers optimised lighting for both wide open areas and narrow aisle applications.


### APPLICATIONS

Warehouse, Storage Facilities, Storage Rooms, Indoor Recreation, Kitchen / Food Prep

### DIMENSION DIAGRAMS

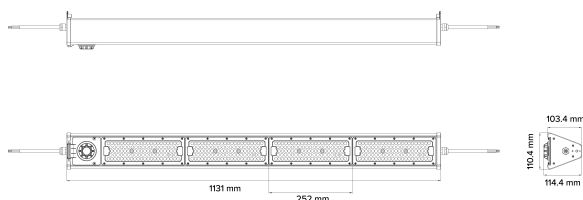

### PHOTOMETRIC DIAGRAM

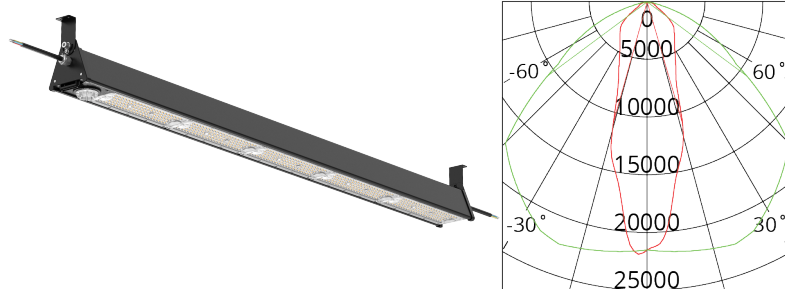

Unit: cd  
 - C0/180 31.9deg  
 - C90/270 106.6deg

### KEY INFORMATION

Power	100 W 150 W 200 W
Lumen Output	100 W: 16000lm 150 W: 240000 lm 200 W: 32000 lm
Mounting Type	Suspended
Dimming Type	0-10V Dimmable
Body Colour	Black
IP Rating	IP65
IK Rating	IK10
Operating Ambient Temp.	-35 to 50°C
Connection Type	1.5m Flex & Plug
Driver	Integral
Warranty	5 yrs

### PHOTOMETRIC

Efficacy	160 lm/W
CCT	4000 K
CRI	> 80
SDCM	< 5
UGR	N/A
Beam Angle	40° x 120°
Flicker-Free	Yes
Projected Lifespan	>54,000hrs @ Ta 25°C (L70)

### ELECTRICAL

Input Voltage	100-240V, 50/60Hz
Power Factor	> 0.9
Electrical Classification	Class I
Flicker-free	Yes
Surge Protection	Overload / Short Circuit

### OTHERS

Body Material	Aluminium
Diffuser Material	PMMA (acrylic)
HACCP Approval	No
Weight	1.3 kg
Dimensions	1131 x 115 x 110 mm

\*This datasheet is for interim use only.