

SOLO

SOLO350W

SAP CODE: 2002358

Phase-Cut (Trailing Edge) LED Dimmer

The SOLO LED Dimmer features advanced phase-cut dimming technology and an optimised dimming range for reliable, smooth and precise control of Haneco's dimmable luminaires.

Accessories



SOLO-KNOB-WH
SAP CODE: 2002360
White Dimmer Knob For LED
SOLO Dimmer




SOLO-KNOB-BK
SAP CODE: 2002361
Black Dimmer Knob For LED
SOLO Dimmer



LCC25UF
SAP CODE: 2001210
Load Correction Capacitor
0.33uF/305Vac Capacitance
Value



(load bypass capacitor
included)

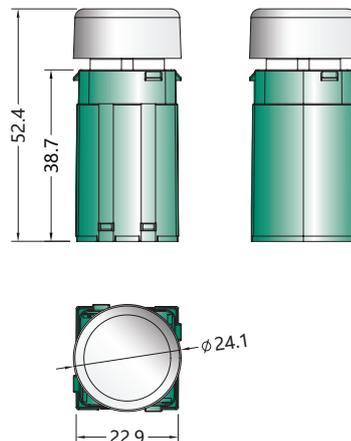

QUICK FACTS

- Trailing edge dimmer suitable for compatible Haneco fittings
- Maximum load 350W (e.g. over twenty LED downlights)
- Compatible with standard wall plates and apertures
- Simple 2 wire design for easy installation


DERATING LEVELS

| Multigang Derating | Max Load (at 25 °C) | Min Load (at 50 °C) |
|--------------------|---------------------|---------------------|
| 1 | 350 W | 175 W |
| 2 | 300 W | 150 W |
| 3 | 250 W | 125 W |
| 4 | 200 W | 100 W |

SPECIFICATIONS

| | |
|----------------------------|------------------------|
| Dimming Method | Phase-Cut Dimming (TE) |
| Supply Voltage | 220-240 V, 50 / 60 Hz |
| Max. Load Wattage | 350 W |
| Dimming Range | 2 % to 100 % |
| Operating Ambient Temp. | 0 to 40 °C |
| Thermal Derating | -20 to 70 °C |
| Weight | 25 g |
| Overcurrent Protection | Yes |
| Overvoltage Protection | Yes |
| Overtemperature Protection | Yes |
| Noise Immunity | Yes |
| Retain Dimmer Setting | Yes |
| Mechanical Stop | Yes |
| Connection Type | 110mm Flying Leads |
| Housing | Acrylic |
| Connection Insulation | PVC |
| Warranty | 3 yrs |

ONE WAY CONNECTION



TWO WAY CONNECTION

