



SPOTIVA

SPOTIVA12W

SAP CODE: 2002669


Precision lighting for art, ambience, and architecture.

SPOTIVA is a professional spotlight designed for hospitality, gallery, and architectural environments. Delivering CRI 90 colour accuracy and UGR < 19 visual comfort, it enhances every artwork and interior with clean, flicker-free illumination. With 2700 K, 3000 K, and 4000 K options and 30° / 60° beam angles, SPOTIVA adapts perfectly to different moods and applications.

APPLICATIONS

Accent / Display / Feature Lighting, Theatre Rooms, Games Rooms, Showrooms, Function Areas, Retail Spaces, Cocktail Lounges

DIMENSION DIAGRAMS

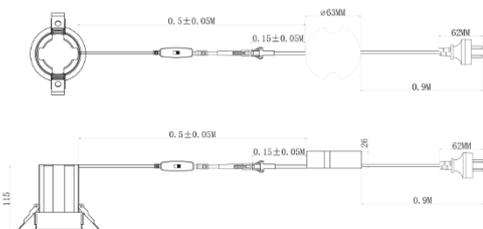


Disclaimer

NOTE1: SDCM values measured on 2700K/4000K CCT



PHOTOMETRIC DIAGRAM



Unit: cd

— C0/180,63.1 — C60/240,63.1

— C30/210,63.1 — C90/270,63.1

Photometric diagram shown is for 3000K output.

KEY INFORMATION

Power	12 W
Lumen Output	866 / 943 / 920 lm
Cutout Size	Ø 75 mm
Mounting Type	Recessed
Dimming Type	Phase-Cut Dimmable (Trailing Edge, 10-100%)
Body Colour	White
IP Rating	IP40 F - IP20 B
IC Rating	IC
Operating Ambient Temp.	-20°C to 45°C
Connection Type	0.9m Flex & Plug
Driver	Remote
Warranty	5 yrs

PHOTOMETRIC

Efficacy	75 / 85 / 79 lm/W
CCT	2700 / 3000 / 4000 K
CRI	> 90
SDCM	< 3
UGR	<19
Beam Angle	60°
Flicker-Free	Yes
Projected Lifespan	54,000hrs @ Ta25°C(L80B50)

ELECTRICAL

Input Voltage	220-240Vac 50/60Hz
Driver Output Voltage	30-40V DC
Driver Output Current	260 mA
Power Factor	> 0.9
Electrical Classification	Class II
Surge Protection	Overload / Short Circuit

OTHERS

Adjustable Angle	90° vertically, 355° horizontally
Body Material	Plastic coated Aluminium
Diffuser Material	PMMA
Rebate Scheme Approvals	Not Applicable
HACCP Approval	No
Weight	0.45 kg
Dimensions	Ø85 x 115 mm