





STAX^{ECO} MULTI

The STAX ECO MULTI is a versatile and efficient LED Floodlight. With switchable temperature and dual power versions it also has an optional PIR motion sensor available, making it suitable for a wide range of applications.

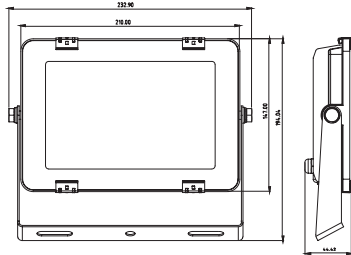

| Product Code | STAX15W30W-TRI | STAX50W-TRI |
|-----------------------------|---|--|
| SAP Code | 2002130 | 2002131 |
| KEY INFORMATION | | |
| Watts | 30W | 50W |
| Input Power | 15W / 30W | 50W |
| Lumen Output (p/metre) | (15W) 1720 / 1850 / 1740lm / (30W) 2710 / 3180 / 2960lm | 5330 / 5410 / 4730lm |
| Install | Surface Mount | Surface Mount |
| Dimming Options | Non-Dimmable | Non-Dimmable |
| Fitting Colour | Matte Black | Matte Black |
| Warranty | 3 years | 3 years |
| IP Rating | IP66 | IP66 |
| IK Rating | IK08 | IK08 |
| IC Rating | N/A | N/A |
| Rebate Scheme Approval | IPART LCP 29.5 | IPART LCP 53.3 |
| PHOTOMETRICS | | |
| Efficacy | (15W) 115 / 123 / 116lm/W / (30W) 90 / 106 / 99lm/W | 107 / 108 / 95lm/W |
| LED | SMD | SMD |
| CCT | 4000 / 5000 / 6000K | 4000 / 5000 / 6000K |
| Beam Angle | 110° | 110° |
| ELECTRICAL | | |
| Driver | Integral (DOB) | Integral (DOB) |
| Supply Input | 220-240Va.c. 50/60Hz | 220-240Va.c. 50/60Hz |
| Driver Output Voltage | - | - |
| Power Factor | >0.9 | >0.9 |
| LED Input Current (nominal) | - | - |
| Useful life @Ta25° (L70) | 54,000hr | 54,000hr |
| CONSTRUCTION | | |
| SDCM | <5 | <5 |
| Housing | Die-cast Aluminum | Die-cast Aluminum |
| Optics | Glass Lens | Glass Lens |
| Adjustable Angle | N/A | N/A |
| Fixings/Hardware | Mounting bracket | Mounting bracket |
| Connection Type | Flex | 1m Flex |
| Total Weight | 0.6kg | 1.2kg |
| Dimensions | 140x178.5x26mm | 195x233x45mm |
| Operating Ambient Temp. | -20 to 45°C | -20 to 45°C |
| Electrical Classification | Class 1 | Class 1 |
| Diagrams |  |  |
| Accessories |  STAX90D-BRKT-S |  STAX-SENSOR STAX90D-BRKT-S |