

STAX PLUS

STAX70WPLUS


SAP CODE: 2002650

STAX PLUS is a high-performance asymmetric floodlight designed to offer precision light distribution for efficient, reliable illumination across sports, industrial and outdoor applications.


APPLICATIONS

Shed, Side of Building, Temporary Installations, General Industrial, Area Lighting, Carparks, Carports, Outdoor Recreation

DIMENSION DIAGRAMS

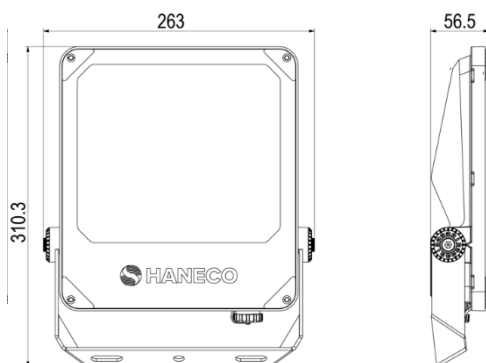

PHOTOMETRIC DIAGRAM



Unit: cd

— C0/180 134.4deg

— C90/270 69.8deg

Photometric diagram shown is for 4000K output.

KEY INFORMATION

Power	30W 50W 70W
Lumen Output	4,182 / 4,238 / 4,245 lm 6,550 / 6,842 / 6,799 lm 9,034 / 9,898 / 9,624 lm
Mounting Type	Surface Mount
Dimming Type	Non-Dimmable
Body Colour	Black
IP Rating	IP66
IK Rating	IK08
Operating Ambient Temp.	-20 to 45°C
Connection Type	1m Flex without plug
Driver	Integral
Warranty	5 yrs

PHOTOMETRIC

Efficacy	139 / 144 / 143 lm/W 141 / 151 / 146 lm/W 129 / 146 / 137 lm/W
CCT	3000 / 4000 / 5000 K
CRI	> 80
SDCM	≤5
Beam Angle	70x140°
Flicker-Free	No
Projected Lifespan	>102,000hr @Ta45° (L80)

Input Voltage 120-277Vac 50/60HZ

Power Factor >0.9

Electrical Classification Class I

Surge Protection 6kV

OTHERS

Body Material	Diecast Aluminum
Diffuser Material	Glass
Rebate Scheme Approvals	Not Applicable
Weight	2.64kg
Dimensions	263 x 311 x 57mm