HANECO

STELLAR 60

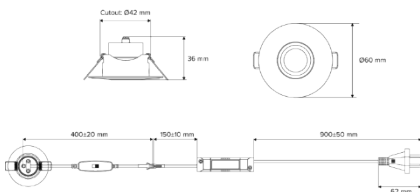**STELLAR60-TRI**
SAP CODE: 2002577

Perfect feature and accent lighting

STELLAR 60 is a small adjustable LED downlight, perfect for accent lighting. It comes in a range of colour temperatures to suit most applications including residential, display cabinets, retail or hospitality.

APPLICATIONS

Butler Pantry, Cabinetry, Accent / Display / Feature Lighting, Walk-in Wardrobes, Theatre Rooms, Games Rooms, Showrooms
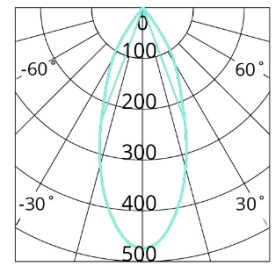
PHOTOMETRIC DIAGRAM

Unit: cd
— C0/180 40.9deg
— C90/270 40.9deg

KEY INFORMATION	
Power	4 W
Lumen Output	230 / 273 / 270 lm
Cutout Size	Ø42 mm
Mounting Type	Recessed
Dimming Type	Non-Dimmable
Body Colour	White (RAL 9010)
IP Rating	IP40 F - IP20 B
IC Rating	Do Not Cover
Operating Ambient Temp.	-20 to 45°C
Connection Type	JST Connector
Driver	Remote
Warranty	5 yrs
PHOTOMETRIC	
Efficacy	56 / 69 / 65 lm/W
CCT	2700 / 3200 / 4000 K
CRI	> 80
SDCM	< 3
UGR	< 25
Beam Angle	40°
Flicker-Free	Yes
Projected Lifespan	>54,000hrs@Ta45°C(L70)
ELECTRICAL	
Input Voltage	220-240Vac, 50/60Hz
Power Factor	> 0.5
Electrical Classification	Class II
Surge Protection	Overload / Short Circuit
OTHERS	
Adjustable Angle	-20 to 20°
Body Material	Aluminum 6063
Diffuser Material	Polycarbonate (Clear)
Rebate Scheme Approvals	
Weight	0.152 kg
Dimensions	Ø60 x 36 mm

DIMENSION DIAGRAMS

Disclaimer
NOTE 1: SDCM values measured on 2.7K/4K CCT