



# STELLAR 60

STELLAR60A01

SAP CODE: 2000440

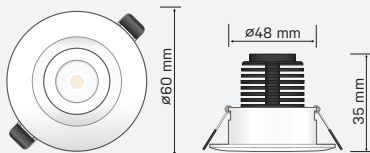

Photometric Diagram

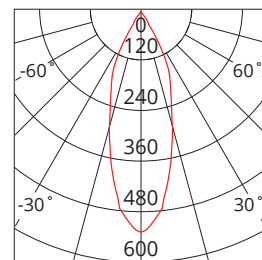

Unit: cd  
 - C0/180 50.0deg  
 - C90/270 50.0deg

3000K, 3W, adjustable,  
35° beam LED downlight

A small adjustable downlight with a bevelled white trim for accent lighting.

## KEY INFORMATION

Lumen Output	250lm
Input Power	3W
Hole Cutout Size	Ø48mm
Dimming Options	Non-Dimmable
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP40
IK Rating	N/A
IC Rating	NON-IC
Rebate Scheme Approvals	N/A

## PHOTOMETRIC

Efficacy	83lm/W
LED	COB
CCT	3000K
CRI	>80
Beam Angle	35°

## ELECTRICAL

Driver	Remote
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	4VDC
Power Factor	>0.9
LED Input Current (nominal)	650mA
Useful life @Ta25° (L70)	50,000hr

## CONSTRUCTION

Housing	Aluminium
Optics	Polycarbonate Multifaceted Reflector
Adjustable Angle	0-30°
Fixings/Hardware	Metal Clip
Connection Type	1.1m Flex & Plug
Total Weight	0.25kg
Dimensions	Ø60x35mm
Operating Ambient Temp.	-20 to 50°C
Electrical Classification	Class 2