




STELLAR

Commercial Downlights


CLASS 2
Double Insulated


DIM
Phase Cut
Dimming


IP40
Ingress
Protection
Rating


0-30°
Adjustment
Angle


50,000hr
Expected
Lifetime


5yr
Warranty

Focal point control.

This adjustable, multifaceted and aesthetically pleasing STELLAR range is the perfect solution where dramatic, high output and focused illumination is required.

Features

- Adjustable reflector
- Multifaceted specular reflector
- Aluminium housing
- Complete with flex and plug
- Remote phase-cut dimmable driver

Benefits

- Directional light where it is needed
- Reduced glare, visible brilliance
- Improved thermal characteristics
- Quick and easy installation
- Enhanced comfort and energy saving

POWER	LUMENS	EFFICACY	CCT	CUTOUT	WEIGHT	SAP CODE	PRODUCT CODE
15W	1230 lm	82 lm/W	4000K	Ø105mm	1.00kg	2000434	STELLAR120A4K
20W	1970 lm	99 lm/W	4000K	Ø125mm	1.00kg	2000436	STELLAR145A4K
30W	2860 lm	95 lm/W	4000K	Ø145mm	1.20kg	2000438	STELLAR170A4K
40W	3450 lm	86 lm/W	4000K	Ø170mm	1.40kg	2000439	STELLAR190A4K

SPECIFICATIONS

Body Material:	Aluminium	Driver:	Remote
Diffuser Material:	Polycarbonate (Clear)	Power Lead:	1.1m Flex & Plug
Reflector:	Multifaceted	Link Lead:	170mm Cable with Flat JST Connector
Fascia colour:	White: RAL9010	Input:	220-240V, 50/60Hz
IP Rating:	Front: IP40 Body: IP40	Electrical Classification	Class 2
Beam Angle:	50°	Power Factor:	>0.9
Gimbal:	0-30°	Protection:	Overload / Short Circuit
CRI:	>80 (>90 option)	Lifespan:	>50,000hrs @Ta25°C (L70)
SDCM:	<5 (<3 option)	Operating Ambient Temperature:	-20 to 50°C
		Smart:	KASTA Compatible
		Dimming:	Phase-Cut Dimmable (Trailing Edge)
			DALI Dimmable Models Available. See Page 212.


APPLICATIONS

Retail
Hospitality



DIMENSIONS

Product Code:	STELLAR120A4K	STELLAR145A4K	STELLAR170A4K	STELLAR190A4K
Diameter:	Ø120mm	Ø145mm	Ø170mm	Ø190mm
Height:	100mm	108mm	150mm	155mm
Cut Out:	Ø105mm	Ø125mm	Ø145mm	Ø170mm
Remote Driver:	160 x 45 x 30mm	160 x 45 x 30mm	160 x 45 x 30mm	165 x 55 x 33mm

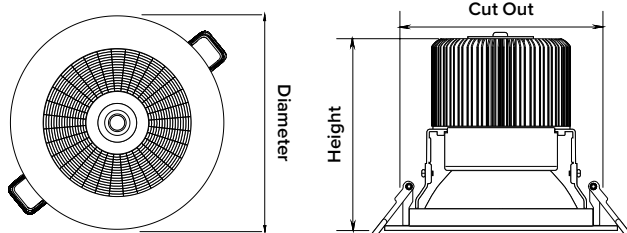

FIND OUT MORE:

