

**HANECO**  
**SIGNATURE**

# **TERRA<sup>x</sup>**

## IK10 LED Battens



**IP66**  
Ingress  
Protection  
Rating



**IK10**  
Impact  
Rating




**DIM**  
Dimming




**TOUGH ON  
THE OUTSIDE,  
SMART ON  
THE INSIDE.**

SCAN ME



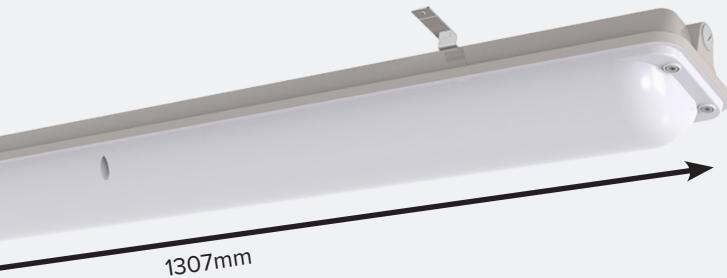

1307mm

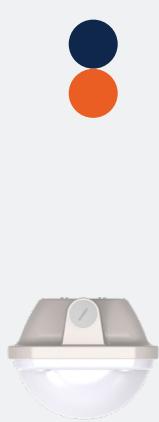

Available in 600 & 1200 models.

## TERRA X IK10 Battens



Impact Rating



Ingress Protection Rating



Dimming



Warranty



The TERRA X IK10 batten is engineered for environments where toughness and performance matter. Its LM6-grade aluminium body, with low copper content, ensures superior corrosion resistance in coastal, industrial, and high-moisture settings. With an IK10 impact rating, it withstands knocks and heavy use without compromise. Add 1-100% DALI-2 dimming for seamless control, energy efficiency, and smart building integration.

Available in 600mm and 1200mm with 3CCT switching, TERRA X delivers flexible, durable, and intelligent lighting. Built for the harshest conditions.

### Product Specification

Product code	TERRAEX06-DALI	TERRAEX12-DALI
SAP code	4001359	4001360
Current	0.16A	0.22A
Inrush Current	39.4A	52.8A
Flicker Free	Yes	
IP Rating	IP66	
IK Rating	IK10	
Colour Temperature	3000K, 4000K, 5000K	
Beam Angle	120°	
Nominal Voltage/ Frequency	220-240Vac, 50/60Hz	
Power Factor	>0.9	
Dimming Technology	DALI 2.0 1 to 100% Dimming range	
Warranty	5 Years	
Product code	L (mm)	W (mm)
TERRAEX06-DALI	699	138
TERRAEX12-DALI	1307	138
	H (mm)	Weight (kg)
	115	2.5
	115	4.2

TERRAEX06-DALI

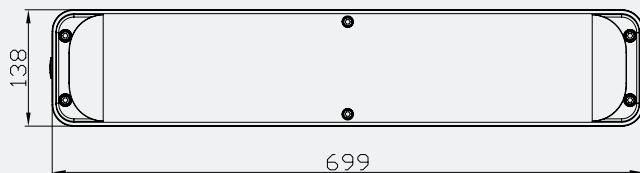

TERRAEX12-DALI

