HANECO SIGNATURE

TERRALUXSP

FLOODLIGHTS

POWER MEETS PRECISION.















hss.haneco.com.au

As a division of the Haneco business group, HSS delivers specialised solutions, including the premium Haneco Signature range.

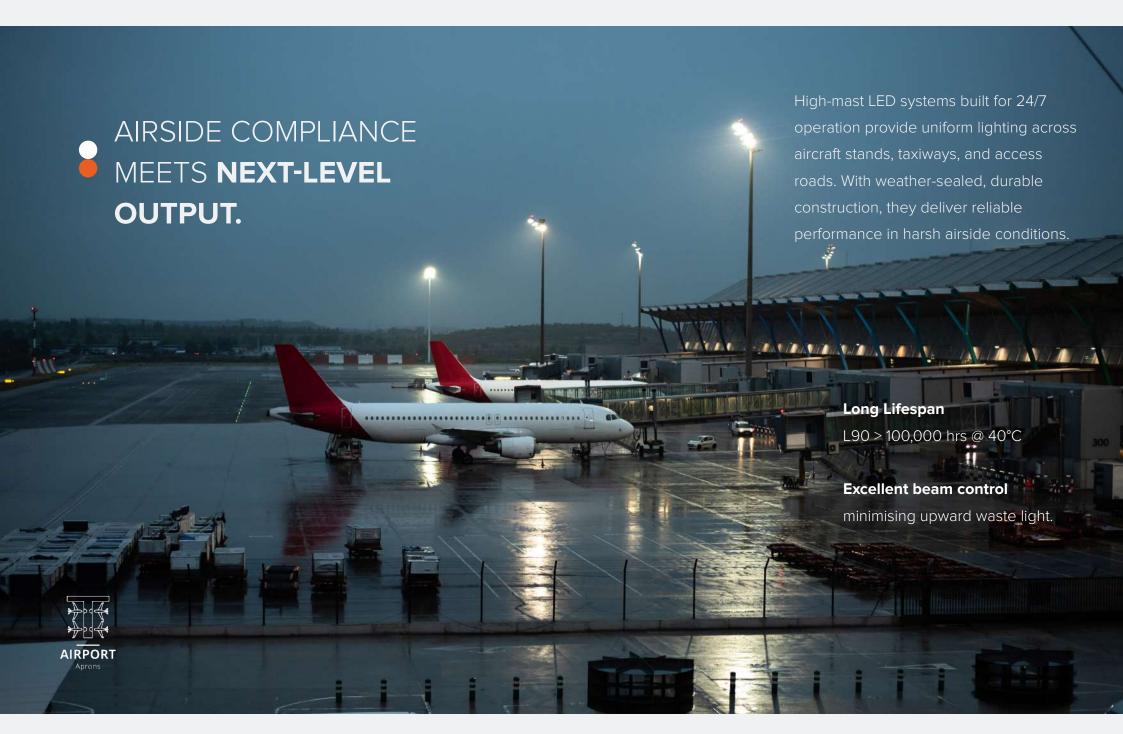



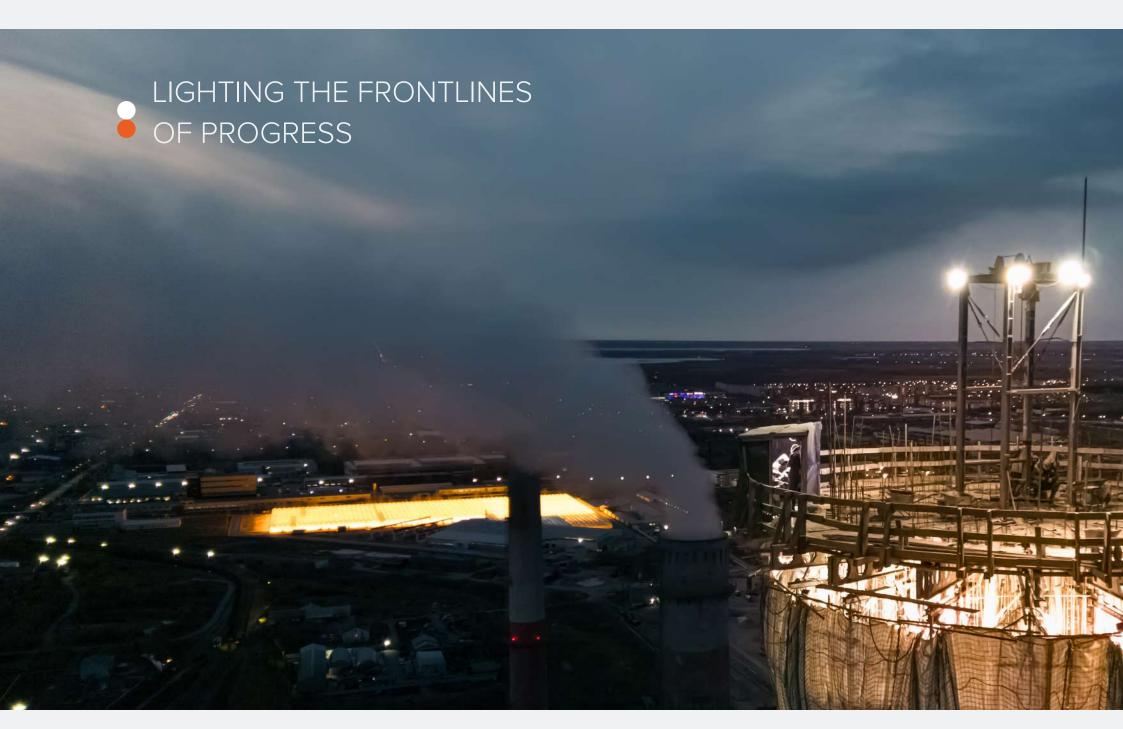




SEE MORE. WORK SAFER. GO FURTHER.

Reliable lighting reduces operational risks, improves equipment visibility, and enhances worker safety — especially in remote, lowlight, or hazardous conditions. Precision optics reduce glare and shadows, helping teams operate with accuracy and confidence during all hours of the day or night.



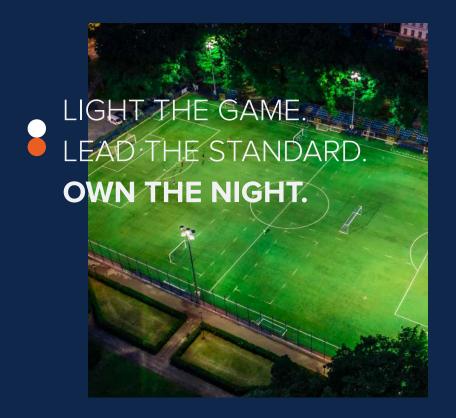



MORE CONTROL. MORE GAME TIME.

Instant ON/OFF with no warm-up delay
Maximise field usage with extended playtime
Ideal for training, matches, and tournaments—

even after dark

OUR LIGHTING DESIGNS DELIVER:

- Uniform horizontal & vertical illuminance
- Low glare and high visibility
- A safer, compliant, and spectator-friendly environment







TERRALUXSP **FLOODLIGHTS**

INNOVATION DELIVERS OPTIMAL PERFORMANCE
















Accessory

Engineered for Performance

Available in 600W and 1200W models, Terralux is perfect for sports fields, courts, airports, industrial/mining sites and public spaces requiring powerful lighting.

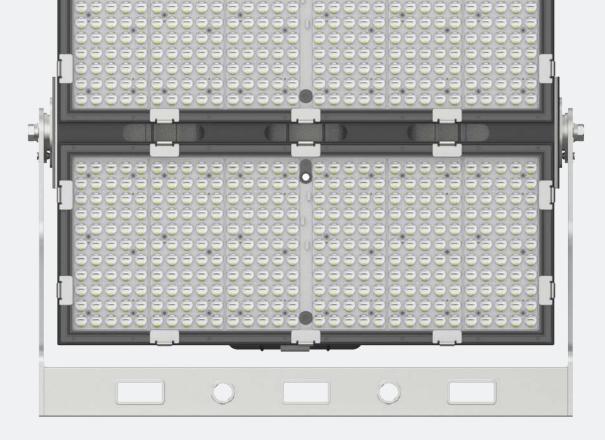






TERRALUX SP 1200W FLOODLIGHT

Product Code: TLSP12-A1740

TERRALUX SP 600W FLOODLIGHT

Product Code: TLSP06-A1740

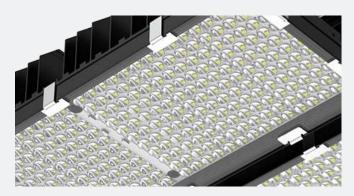


Crisp, Natural Illumination

A 4000K natural white CCT provides ideal colour temperature for high speed ball sports. Providing clarity for athletes, spectators, and broadcasters alike. Balancing comfort and visibility with excellent colour rendering for true-to-life viewing.



Built Tough

Aluminium heat sink for excellent thermal management. Engineered to withstand Australia's toughest conditions.



Precision Light Control

With adjustable tilt from 0° to 90°, light can be focused exactly where needed, minimising spill and glare while enhancing on-field visibility. Whether it's a professional soccer pitch or a suburban netball court, Terralux SP adapts to any environment.



Installation made easier

- Smooth and easy installation process with a flexible trunion mounting system.
- 3 x slots to allow up 52.5mm adjustability which provides flexibility for retrofits/refurbishments.
- M20 Bolt installed in the center of bracket
- Allows for over slung and under slung mounting.



TERRALUX SP 1200W FLOODLIGHT

Product Code: TLSP12-A1740

SAP Code: 4001317

Power


_					
	Lumen Output	Up to 180,000 lm			
	ССТ	4000 K			
	CRI	> 70			
	Beam Angle	A1 Narrow Beam			
	Adjustment Agnle	0° - 90°			
	IK Rating	IK08			
	IP Rating	IP66			
	Warranty	7 Years			
-	CRI Beam Angle Adjustment Agnle IK Rating IP Rating	> 70 A1 Narrow Beam 0° - 90° IK08 IP66			

ELECTRICAL


Input Voltage	180–528Vac, 50/60Hz			
Power Factor	> 0.95			
Electrical Classification	Class I			
Surge Protection	10kV			


OTHERS

Control Type	DALI2.0/ DMX		
Body Material	Aluminium		
Diffuser Material	Tempered Glass		
Operating Ambient Temp.	-20 to 50°C		
Cable Requirement	5c+E		
Weight	24 kg (without driver)		



Applications: Sports fields, Tennis and netball courts, Multi-sport recreational facilities,
Airports and transit hubs, Industrial and mining sites, Ports and container terminals, Large public spaces and car parks, Large public spaces and car parks.






Dimensions (mm) 600 x 514 x 170 (not including trunnion)



Power	Lumen Output	ССТ	CRI	Beam Angle	Adjustment Agnle	IK Rating	IP Rating	Warranty
1200 W	Up to 180.000 lm	4000 K	> 70	A1 Narrow Beam	0° - 90°	IK08	IP66	7 years

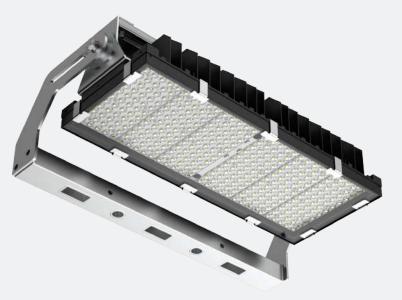

TERRALUX SP 600W FLOODLIGHT

SAP Code: 4001318	


Power			
Lumen Output	Up to 90,000 lm		
ССТ	4000 K		
CRI	> 70		
Beam Angle	A1 Narrow Beam		
Adjustment Agnle	0° - 90°		
IK Rating	IK08		
IP Rating	IP66		
Warranty	7 Years		

ELECTRICAL


Input Voltage	180–528Vac, 50/60Hz			
Power Factor	> 0.95			
Electrical Classification	Class I			


OTHERS

Control Type	DALI2.0/ DMX		
Body Material	Aluminium		
Diffuser Material	Tempered Glass		
Operating Ambient Temp.	-20 to 50°C		
Cable Requirement	5c+E		
Weight	18 kg (without driver)		



Applications: Sports fields, Tennis and netball courts, Multi-sport recreational facilities, Airports and transit hubs, Industrial and mining sites, Ports and container terminals, Large public spaces and car parks, Large public spaces and car parks.






Dimensions (mm) 600 x 246 x 168 (not including trunnion)



Power	Lumen Output	ССТ	CRI	Beam Angle	Adjustment Agnle	IK Rating	IP Rating	Warranty
600 W	Up to 90,000 lm	4000 K	> 70	A1 Narrow Beam	0° - 90°	IK08	IP66	7 years

OPTIONAL ACCESSORIES

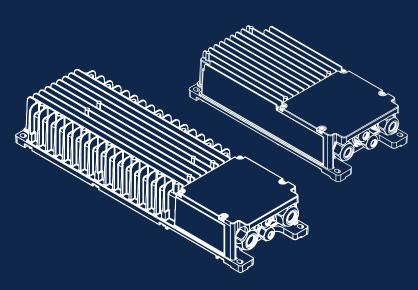

ELECTRONIC CONTROL GEAR

Product Code TLSP12-EDRVR I SAP Code 4001319

TERRALUX SP 1200W ELECTRONIC CONTROL GEAR 180-528V DALI2.0 Product Code TLSP06-EDRVR | SAP Code 4001320

TERRALUX SP 600W ELECTRONIC CONTROL GEAR 180-528V DALI2.0




Product Code TLSP12-DRVRBKT | SAP Code 4001321

DRIVER MOUNTING BRACKET SET 1200W


Product Code TLSP06-DRVRBKT I SAP Code 4001326

TERRALUX SP DRIVER MOUNTING BRACKET SET 600W

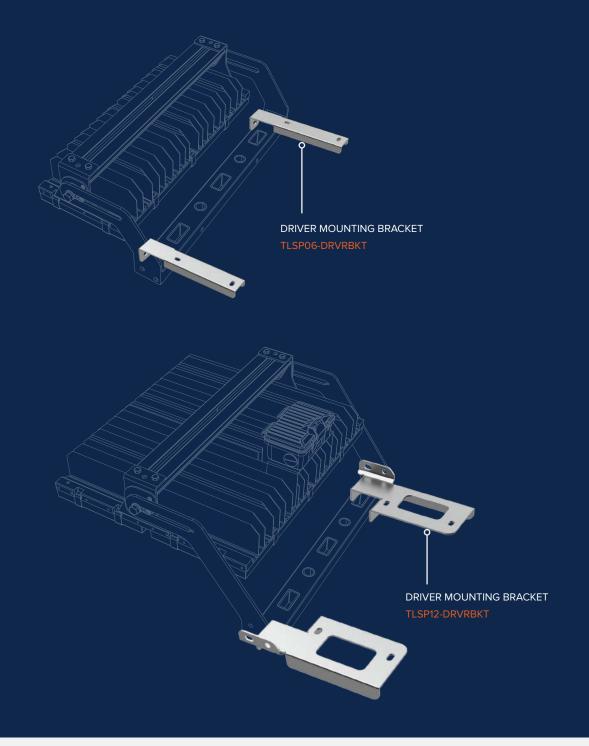




Product Code TLSP-BIRDSPIKE I SAP Code 4001325

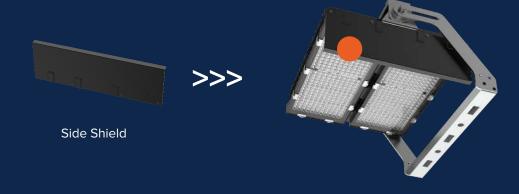

SHIELD KIT

Product Code TLSP12-FSHLD | SAP Code 4001322 1200W FRONT SHIELD KIT Product Code TLSP12-SSHLD | SAP Code 4001324 1200W SIDE SHIELD KIT Product Code TLSP12-BSHLD | SAP Code 4001323 1200W BACK SHIELD KIT

Product Code TLSP06-FSHLD | SAP Code 4001327 600W FRONT SHIELD KIT Product Code TLSP06-SSHLD | SAP Code 4001329 600W SIDE SHIELD KIT

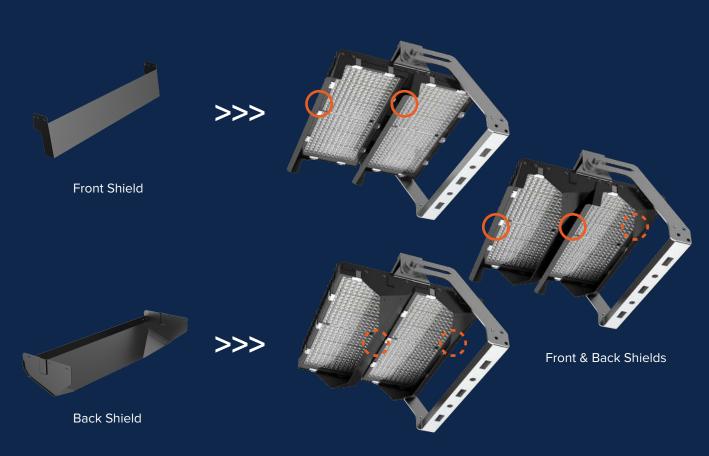






TERRALUX^{SP} FLOODLIGHTS



TERRALUX SP 1200W FLOODLIGHT
Product Code: TLSP12-A1740



TERRALUX SP 600W FLOODLIGHT
Product Code: TLSP06-A1740