

TRIM^{PLUS}

Fixed/Wall washer LED downlights

POWER Switchable Modes | >90 CRI Colour Rendering Index | Flicker Free | 2700K 3000K 4000K Colour Temperature | UGR<19 Low Glare | DIM Phase Cut Dimming | 55° Beam Angle | IP44 Ingress Protection Rating *From below only | 54,000hr Projected Lifespan

Light Where It Matters

The TRIM^{PLUS} Series delivers premium low-glare illumination in a sleek ultra-slim design. With single fixed, single wall washer options, it provides the flexibility to suit a wide range of residential and commercial applications.

Features

- Dimmable driver
- Excellent feature lighting option
- IP44 rating (from below)
- Sleek diecast aluminium housing
- Power switchable
- High Colour Rendering Index (CRI)
- Low Unified Glare Rating (UGR)

Benefits

- Adjustable brightness to improve comfort.
- Ideal for accent lighting.
- Ideal for a wide variety of indoor applications.
- Improve asethetic design whilst improving thermal characteristics.
- Adjust the light to suit the requirements.
- True colour definition to highlight natural colour.
- Excellent lighting option for indoor work places.

TRIM^PLUS

Product Overview

PRODUCT CODE	POWER	LUMENS	EFFICACY	CCT	WEIGHT	SAP CODE	COLOUR
TRIMPLUS12W-FIX	6/8/10/12 W	531 / 575 / 588 lm 704 / 769 / 768 lm 879 / 978 / 966 lm 987 / 1126 / 1090 lm	77 / 89 / 83 lm/W 75 / 89 / 81 lm/W 82 / 91 / 90 lm/W 81 / 92 / 87 lm/W	2700 / 3000 / 4000 K	0.45 kg	2002768	White
TRIMPLUS12W-WW	6/8/10/12W	515 / 557 / 571 lm 683 / 743 / 747 lm 858 / 957 / 941 lm 961 / 1067 / 1033 lm	80 / 88 / 87 lm/W 79 / 89 / 85 lm/W 75 / 87 / 81 lm/W 73 / 85 / 78 lm/W		0.45 kg	2002769	White

SPECIFICATIONS

Body Material:	Aluminium
Diffuser Material:	PMMA
Body colour:	White
Mounting Type:	Recessed
IP Rating:	IP44 (From below)
Beam Angle:	55°
Flicker Free:	Yes
CRI:	> 90
IC Rating:	Do Not Cover
SDCM:	< 3

Note: SDCM measure at 2700 and 4000K


Driver:	Remote
Connection Type:	0.9m Flex & Plug
Input:	220-240Va.c. 50/60Hz
Electrical Classification:	Class II
Power Factor:	> 0.9
Protection:	Overload / Short Circuit
Lifespan:	>54,000hrs@Ta25°C(L70)
Operating Ambient Temperature:	-20 to 45°C
Smart:	KASTA Compatible

Dimming:	Phase-Cut Dimmable


APPLICATIONS

Bedrooms
Dining Area
Hotel Rooms
Indoor Recreation
Accent / Display / Feature Lighting
Butler Pantry

DIMENSIONS (mm)

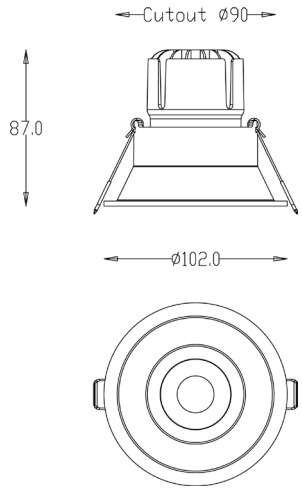

TRIMPLUS12W-FIX

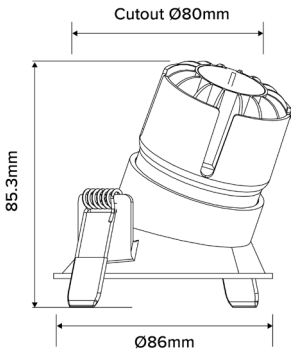

TRIMPLUS12W-WW

Residential Downlights