


# TRIM Double


TRIM22W3K50D

SAP CODE: 2002044

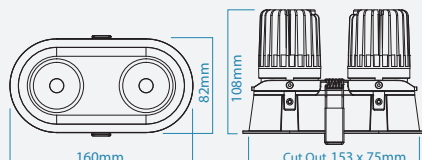

## 22W LED Adjustable Downlight

The TRIM series is a range of aluminum body downlights featuring low glare, a narrow beam angle and an ultra slim trim, this downlight suits hotel & residential applications.

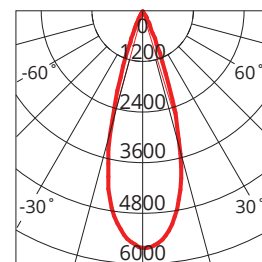Photometric  
Diagram
 Unit: cd  
 C0/180 51.6deg  
 C90/270 51.9deg

### KEY INFORMATION

Lumen Output	1790lm
Input Power	22W
Hole Cutout Size	153x75mm
Install	RECESSED
Dimming Options	*Phase-Cut Dimming
Fitting Colour	WHITE
Warranty	5yr
IP Rating	IP20
IK Rating	N/A
IC Rating	NON-IC
Rebate Scheme Approvals	N/A

### PHOTOMETRIC

Efficacy	81lm/W
LED	COB
CCT	3000K
CRI	>80
Beam Angle	50

### ELECTRICAL

Driver	Remote
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	40V DC
Power Factor	>0.9
LED Input Current (nominal)	550mA
Useful life @Ta25° (L70)	50,000hr

### CONSTRUCTION

Housing	Aluminium ADC12
Optics	Plastic Clear Lens
Adjustable Angle	0-30°
Fixings/Hardware	Rubberised Clip
Connection Type	1.1m Flex & Plug
Total Weight	0.55kg
Dimensions	160 x 82 x 108mm
Operating Ambient Temp.	-20 to 40°C
Electrical Classification	Class 2

\*Dimming performance may vary depending on the specifications of the dimmer being used. For best performance use Haneco or KASTA dimmers.