



# TRIPROOF<sup>YG</sup>

## Weatherproof Battens



### Tried and trusted design.

**TRIPROOF YG** are weatherproof LED battens with a striking robust design and suitability for higher ambient temperatures. This model offers a specific Yellow colour output suitable for attracting fewer insects than traditional white lights, and a specific Green colour output suitable for eyewash bays.

### Features

- IP65 and IK08 rating
- Yellow light attracts less insects
- Green light suitable for eyewash bays
- Power switchable
- Easy terminal block access
- High ambient temperature rating (>40°C)
- Choice of sizes to choose from
- Durable UV stabilised polycarbonate
- Tamper-proof screws
- Stainless steel (301) clips
- Simple 2 pieces flip-open design
- Versatile mounting options

### Benefits

- Ideal for bathrooms and universal outdoor applications
- Ideal for rural areas or high insect infested areas
- Safely guide visually impaired individuals to medical aid
- Adjust the light to suit the requirements
- Aids in improving the installation process
- Long lasting in hot environments
- Adaptable to various application requirements
- Long lasting body for outdoor installations
- Vandal resistant security
- Anti-corrosive material for longevity
- Provides quick & easy installation
- Expand the lighting possibilities with different mounting configurations

## Product Overview

Nominal Length 600mm

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE
18W	2216 (Y), 2041 (G)	Up to 125 lm/W	Yellow (580 nm)	618 x 116 x 74mm	1.55kg	2002301	<b>TRIPROOF06-YG</b>
20W	2128 (Y), 2129 (G)	Up to 111 lm/W	Green (528 nm)		1.30kg	2002302	<b>TRIPROOF06-YG-EM</b>

Nominal Length 1200mm

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE
38W	4633 (Y), 4430 (G)	Up to 127 lm/W	Yellow (580 nm)	1215 x 116 x 74mm	2.40kg	2002303	<b>TRIPROOF12-YG</b>
40W	4604 (Y), 4162 (G)	Up to 121 lm/W	Green (528 nm)		2.65kg	2002304	<b>TRIPROOF12-YG-EM</b>

EM = Emergency


### SPECIFICATIONS

<b>Body Material:</b>	Polycarbonate	<b>Driver:</b>	Integral	<b>Smart:</b>	KASTA Compatible
<b>Diffuser Material:</b>	Polycarbonate (Opal)	<b>Power Connection:</b>	PA14 Terminals	<b>Dimming:</b>	Non-Dimmable
<b>Body colour:</b>	Grey	<b>Input:</b>	220-240V, 50/60Hz		
<b>IP Rating:</b>	IP65	<b>Electrical Classification:</b>	Class 1		
<b>IK Rating:</b>	IK08	<b>Power Factor:</b>	>0.9		
<b>Beam Angle:</b>	120°	<b>Protection:</b>	Overload / Short Circuit		
<b>CRI:</b>	>80	<b>Lifespan:</b>	>50,000hrs @Ta25°C (L70)		
<b>SDCM:</b>	<5	<b>Operating Ambient Temperature:</b>	-20 to 45°C (Standard) 0 to 45°C (EM)		

### APPLICATIONS

- Outdoor Recreation
- Kitchen / Food Prep
- Balconies / Patios / Verandah
- Awnings
- Garage
- Shed
- Carport
- Side of Building
- Carpark
- Store Rooms
- Hangers
- Workshops
- Manufacturing Facilities
- Public Facilities
- Cool Rooms
- Indoor Recreation
- General Industrial
- Area Lighting

### DIMENSIONS

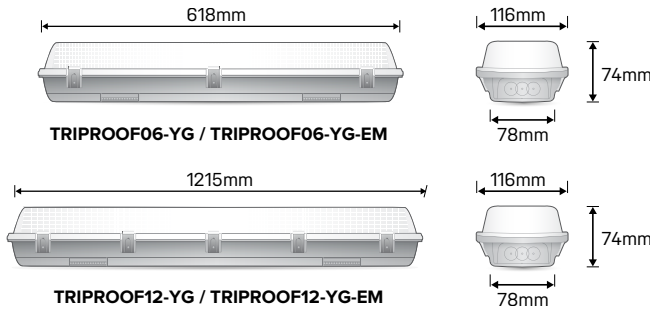

FIND OUT MORE:

