


TRIPROOF

TRIPROOF20/40W12-TRI

SAP CODE: 2001168

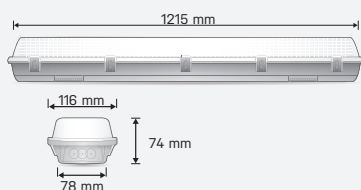


1200mm, 20W/40W, Tritone, rugged indoor/ outdoor LED batten

A robust outdoor/indoor IK08 vandal resistant LED batten with Tritone switchable colour temperature and Ecoswitch, a switch to select 20 or 40W.

Accessories

SUSPENSION KIT


 Photometric
Diagram


Unit: cd

 - C0/180 110.0deg
 - C90/270 110.0deg

KEY INFORMATION

Lumen Output ^{40W}	4090 / 4410 / 4050lm
- Low Power Mode ^{20W}	2230 / 2250 / 1970lm
Input Power	20 / 40W
Hole Cutout Size	N/A
Install	SURFACE MOUNT
Dimming Options	Non-Dimmable
Trim Colour	WHITE
Warranty	5yr
IP Rating	IP65
IK Rating	IK08
IC Rating	N/A
Rebate Scheme Approvals	VEET; REES; IPART LCP 41.29

PHOTOMETRIC

Efficacy ^{40W}	102 / 110 / 101lm/W
- Low Power Mode ^{20W}	111 / 113 / 98lm/W
LED	SMD
CCT	4000 / 5000 / 6500K
CRI	>80
SDCM	4
Beam Angle	120°

ELECTRICAL

Driver	Integral
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	20-57VDC
Power Factor	>0.9
LED Input Current (nominal)	350-700mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Polycarbonate
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	Bracket
Connection Type	Terminal Block PA14
Total Weight	2kg
Dimensions	1215x116x74mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 1
Food Grade Approval	HACCP