



VISTA HERO

Indoor Battens



Conventional and elegant.

VISTA HERO is a conventional but elegant wide body (125mm) batten suitable for either new installations or retrofit. It offers both Intellisensor (MS) and emergency (EM) versions.

Features

- Tritone and power switchable
- Wide body batten
- HACCP approved
- Emergency versions
- Sensor versions

Benefits

- Reduced SKUs and inventory levels
- Perfect for retrofit
- Suitable for food manufacturing
- Provides safety in case of power outages
- Supports power conservation

Product Overview

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE		
19W	2190 lm	115 lm/W	4000K	1230 x 125 x 68mm	1.90kg	2001940	VISTA-HR12 VISTA-HR12-EM		
	2190 lm	115 lm/W	4700K						
	2090 lm	110 lm/W	5700K						
26W	3000 lm	115 lm/W	4000K					2.20kg	2001941
	3030 lm	117 lm/W	4700K						
	2840 lm	109 lm/W	5700K						
31W	3370 lm	109 lm/W	4000K						
	3440 lm	111 lm/W	4700K						
	3200 lm	103 lm/W	5700K						
40W	4130 lm	103 lm/W	4000K						
	4240 lm	106 lm/W	4700K						
	3880 lm	97 lm/W	5700K						

EM = Emergency


POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE
40W	4420 lm	110 lm/W	4000K	1165 x 125 x 68mm	2.45kg	2001942	VISTA-HR12-MS VISTA-HR12-EM-MS
	4580 lm	114 lm/W	4700K				
	4290 lm	107 lm/W	5700K		2.55kg	2001943	

EM = Emergency MS = Intellisensor

SPECIFICATIONS	
Body Material:	Aluminium
Diffuser Material:	Polycarbonate (Opal)
Body colour:	White: W002
IP Rating:	IP20
Beam Angle:	120°
CRI:	>80 (>90 option)
SDCM:	<5 (<3 option)
Driver:	Integral
Power Connection:	PA14 Terminals
Input:	220-240V, 50/60Hz
Electrical Classification:	Class 1
Power Factor:	>0.9
Protection:	Overload / Short Circuit
Lifespan:	>50,000hrs @Ta25°C (L70)
Operating Ambient Temperature:	-20 to 45°C
Dimming:	Non-Dimmable

APPLICATIONS
Residential Retrofit
Offices
Garages
Industrial
Retail
Schools

DIMENSIONS

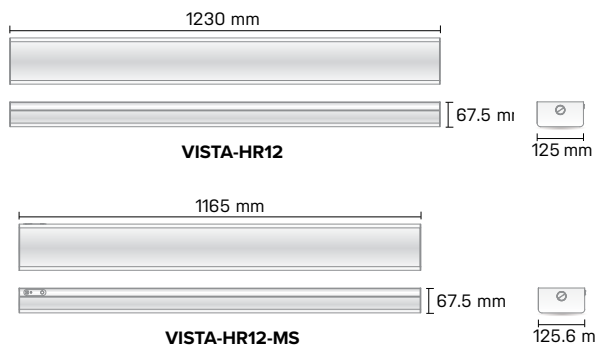

FIND OUT MORE:

