



# VISTA LINE

## Indoor Battens

  
**TRITONE**  
Colour  
Changeable

  
**IP40**  
Ingress  
Protection  
Rating

  
**YES**  
Gov  
Rebate

  
**50,000hr**  
Expected  
Lifetime

  
**5yr**  
Warranty

### Sleek and narrow.

VISTA LINE (formerly VISTA LITE) is a sleek and narrow body batten. The ideal budget option either for new installations or to replace single battens without compromising on features.

### Features

- Tritone and power switchable
- Narrow body batten design
- Suspended or surface mount
- Emergency versions

### Benefits

- Reduced SKUs and inventory levels
- Improved aesthetics
- Extended application options
- Provides safety in case of power outages

## Product Overview

Nominal Length 600mm

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE
20W	2150 lm	108 lm/W	4000K	615 x 68 x 68mm	0.90kg 1.90kg	2001630 2001631	<b>VSL20W06-TRI</b> <b>VSL20W06-TRI-EM</b>
	2260 lm	113 lm/W	4700K				
	2130 lm	107 lm/W	5700K				


Nominal Length 1200mm

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE
20W (Ecoswitch)	2100 lm	108 lm/W	4000K	1205 x 68 x 68mm	1.80kg 2.80kg	2001634 2001635	<b>VSL20W40W12-TRI</b> <b>VSL20W40W12-TRI-EM</b>
	2300 lm	113 lm/W	4700K				
	2200 lm	107 lm/W	5700K				
40W	4200 lm	106 lm/W	4000K	1205 x 68 x 68mm	1.80kg 2.80kg	2001634 2001635	<b>VSL20W40W12-TRI</b> <b>VSL20W40W12-TRI-EM</b>
	4600 lm	114 lm/W	4700K				
	4400 lm	108 lm/W	5700K				

EM = Emergency

Indoor Battens


SPECIFICATIONS		APPLICATIONS	
<b>Body Material:</b> Steel	<b>Driver:</b> Integral	Retail Offices Schools Corridors Workshops	
<b>Diffuser Material:</b> Polycarbonate (Opal)	<b>Power Connection:</b> PA14 Terminals		
<b>Body colour:</b> White: W002	<b>Input:</b> 220-240V, 50/60Hz		
<b>IP Rating:</b> IP40: 1200mm models IP20: 600mm models	<b>Electrical Classification:</b> Class 1		
<b>Beam Angle:</b> 120°	<b>Power Factor:</b> >0.9		
<b>CRI:</b> >80	<b>Protection:</b> Overload / Short Circuit		
<b>SDCM:</b> <5	<b>Lifespan:</b> >50,000hrs @Ta25°C (L70)		
	<b>Operating Ambient Temperature:</b> -20 to 45°C		
	<b>Dimming:</b> Non-Dimmable		

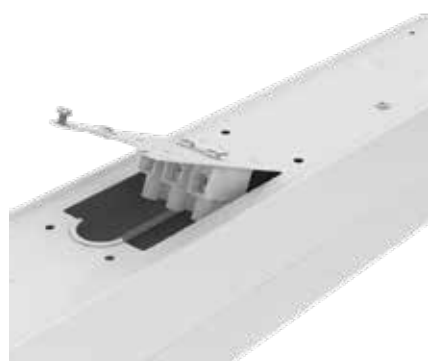

Terminal Access Panel



## DIMENSIONS

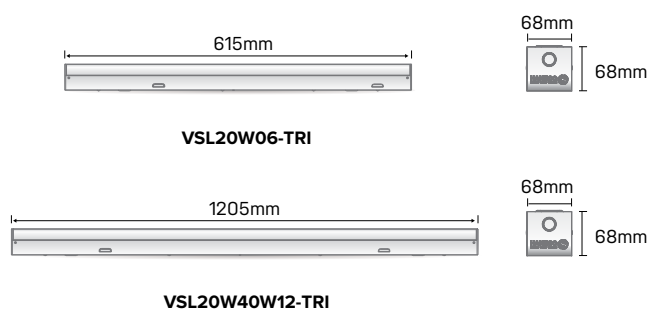

FIND OUT MORE:

