




## VISTA WIRE GUARD

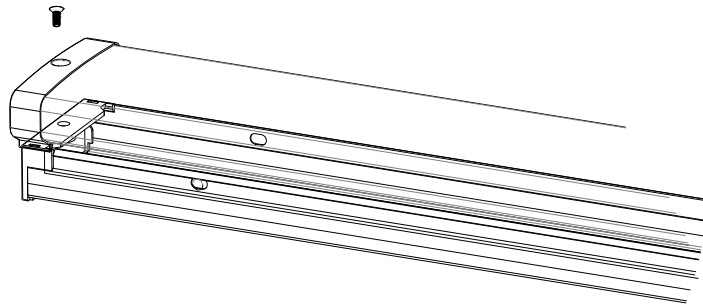


1. Remove screw on either end.

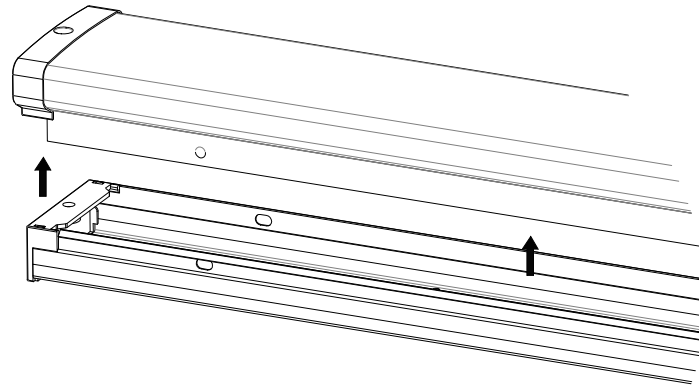


2. Seperate diffuser from housing.

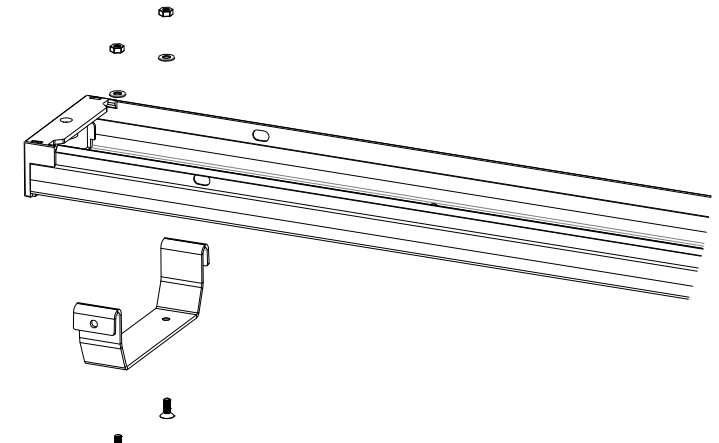


3. Fasten bracket to housing. Repeat on opposite end.

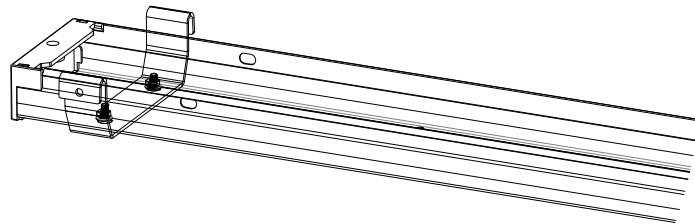


4. Fasten bracket to housing. Repeat on opposing end.

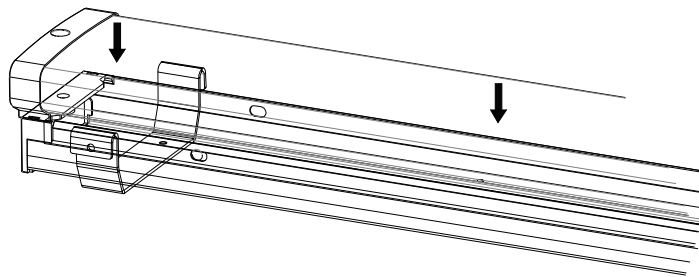

5. Replace diffuser.

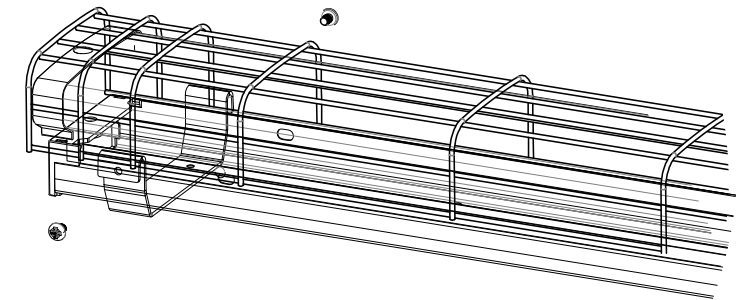

6. Place wire guard into channel of bracket. Secure with screw.

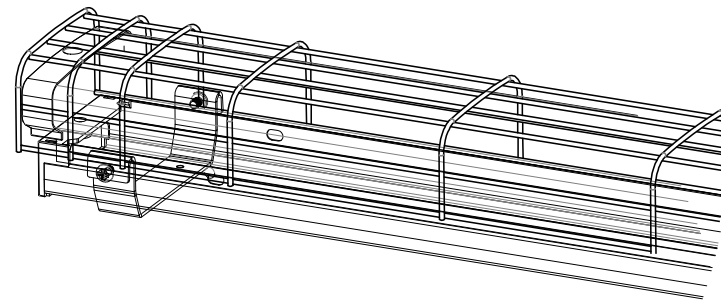

7. Repeat on opposite end.