



VISTA

Indoor Battens



TRITONE
Colour
Changeable



IP20
Ingress
Protection
Rating



HACCP
Food
Safe



YES
Gov
Rebate



50,000hr
Expected
Lifetime



5yr
Warranty

Simple, efficient and flexible.

VISTA, a household name synonymous for quality, when it comes to LED battens. With an extensive range including emergency versions, VISTA covers a huge range of applications and is the perfect LED replacement for conventional predecessors. Smart technology such as sensors provide energy savings while Tritone and power switchable technology reduces complexity for the customer.

Features

- Tritone and power switchable
- HACCP approved
- Easy terminal block access
- Extensive range
- Emergency versions
- Sensor versions

Benefits

- Reduced SKUs and inventory levels
- Suitable for food manufacturing
- Quick and easy installation
- Covering a huge range of applications
- Provides safety in case of power outages
- Supports power conservation

Product Overview

Nominal Length 600mm

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE
20W	2000 lm	100 lm/W	4000K	615 x 84 x 70mm	0.80kg 1.00kg	2001157 2001158	VISTA20W06-TRI VISTA20W06-TRI-EM
	2200 lm	110 lm/W	4700K				
	2100 lm	105 lm/W	5700K				

Nominal Length 1200mm

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE
20W	2400 lm	120 lm/W	4000K	1221 x 84 x 70mm	2.00kg 2.20kg	2001161 2001063	VISTA20/40W12-TRI VISTA20/40W12-TRI-EM
	2510 lm	126 lm/W	4700K				
	2430 lm	122 lm/W	5700K				
40W	4540 lm	114 lm/W	4000K				
	4880 lm	122 lm/W	4700K				
	4470 lm	112 lm/W	5700K				
40W	4540 lm	114 lm/W	4000K	1221 x 84 x 70mm	2.00kg 2.20kg	2002232 2001065	VISTA12-SS VISTA40W12-TRI-SS-EM
	4880 lm	122 lm/W	4700K				
	4470 lm	112 lm/W	5700K				

Nominal Length 1500mm

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE
60W	6300 lm	105 lm/W	4000K	1523 x 84 x 70mm	2.50kg	2001162	VISTA60W15-TRI
	6690 lm	112 lm/W	4700K				
	6250 lm	104 lm/W	5700K				

EM = Emergency SS = Intellisensor

Indoor Battens


SPECIFICATIONS

Body Material: Aluminium	Driver: Integral	Smart: KASTA Compatible
Diffuser Material: Polycarbonate (Opal)	Power Connection: PA14 Terminals	Dimming: Non-Dimmable
Body colour: White: W002	Input: 220-240V, 50/60Hz	DALI Dimmable Models Available. See Page 212.
IP Rating: IP20	Electrical Classification: Class 1	
Food Grade Approval: HACCP	Power Factor: >0.9	
Beam Angle: 120°	Protection: Overload / Short Circuit	
CRI: >80 (>90 option)	Lifespan: >50,000hrs @Ta25°C (L70)	
SDCM: <5 (<3 option)	Operating Ambient Temperature: -30 to 45°C	

APPLICATIONS

Retail
Offices
Corridors
Workshops

DIMENSIONS

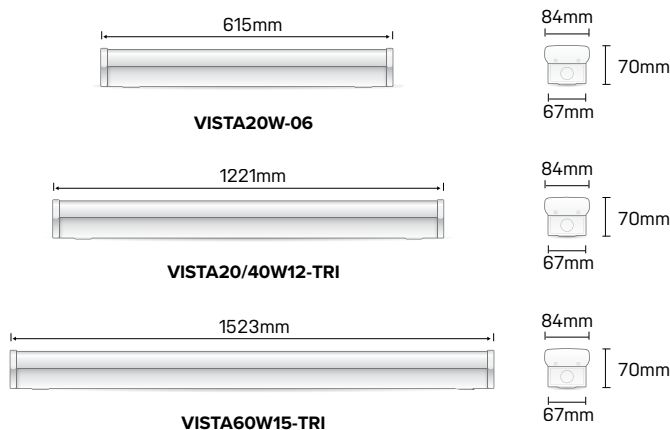

FIND OUT MORE:

