



VIVA 145

Commercial Downlights

CLASS 2
Double Insulated

TRITONE
Colour Changeable

DIM
Phase Cut Dimming

IP44
Ingress Protection Rating

50,000hr
Expected Lifetime

5yr
Warranty

Flush, seamless design.

With its clean flush design and wide range of features, VIVA 145 is a proven performer and has established itself as the customer's choice.

Features

- Tritone selectable
- Flush seamless design
- Integral phase-cut dimmable driver
- Complete with flex and plug

Benefits

- Reduced SKUs and inventory levels
- Unobtrusive appearance
- Enhanced comfort and energy saving
- Quick and easy installation

Product Overview

POWER	LUMENS	EFFICACY	CCT	CUTOUT	WEIGHT	SAP CODE	PRODUCT CODE
14W	1240 lm	89 lm/W	3000K	Ø125mm	0.25kg	2001103	VIVA-145-TRI
	1260 lm	90 lm/W	4200K				
	1160 lm	83 lm/W	5700K				

SPECIFICATIONS

Body Material:	Polycarbonate	Driver:	Integral
Diffuser Material:	Polycarbonate (Opal)	Power Lead:	1.1m Flex & Plug
Fascia colour:	White: RAL9003	Input:	220-240V, 50/60Hz
IP Rating:	Front: IP44 Body: IP20	Electrical Classification	Class 2
Beam Angle:	90°	Power Factor:	>0.9
CRI:	>80 (>90 option)	Protection:	Overload / Short Circuit
SDCM:	<5 (<3 option)	Lifespan:	>50,000hrs @Ta25°C (L70)
		Operating Ambient Temperature:	-20 to 45°C
		Smart:	KASTA Compatible
		Dimming:	Phase-Cut Dimmable (Trailing Edge)


APPLICATIONS

Offices
General Applications

Commercial Downlights



DIMENSIONS

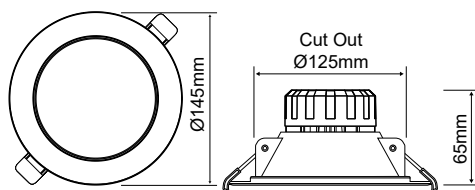

VIVA-145-TRI

FIND OUT MORE:

