



VIVA^{LP}

Residential Downlight



>85
CRI Colour
Rendering
Index



100°
Beam
Angle



IP44*
Ingress
Protection
Rating
*From below only



IC-4
Covered &
Abutted



102,000hr
Projected
Lifespan



5yr
Warranty

A compact and complete luminaire.

VIVA LP from Haneco has become the new benchmark for conventional home lighting systems. The VIVA LP features tritone colour technology, dimming capabilities, and high efficacy outputs all wrapped in a small housing that can meet any installation requirement, helping it to maintain its status as the industry standard for home lighting.

Features

- Low profile design
- Tritone colour changeable
- IC-4 rating (ta 25°C)
- Dimmable driver
- Flush fascia trim
- Modernised design
- High ambient temperature rating (>40°C)
- Various accessories available
- Optional clip-on trims available

Benefits

- Suitable for very shallow ceiling spaces;
- Provides the choice of light hues from a single luminaire;
- Allows for covered and abutted installations;
- Adjustable brightness to improve comfort;
- Provides unobtrusive design appearance;
- Provides high end appearance;
- Long lasting in hot environments;
- Tailor the luminaire to meet the application requirements;
- Extend the design style of the environment

Product Overview


POWER	LUMENS	EFFICACY	CCT	WEIGHT	SAP CODE	PRODUCT CODE
8 W	800 / 850 / 800 lm	100 / 106 / 100 lm/W	3000 / 4200 / 5700 K	0.2 kg	2002396	VIVA-LP

SPECIFICATIONS

Body Material: Polycarbonate	Driver: Integral	Dimming: Phase-Cut Dimmable
Diffuser Material: Polycarbonate (Opal)	Connection Type: 1m Flex & Plug	APPLICATIONS Bedrooms Lounge Room Dining Area Laundry Butler Pantry Hallways Entrance Staircase Bathrooms Ensuite Theatre Rooms Games Rooms Function Areas Hotel Rooms Kitchen / Food Prep
Body colour: White	Input: 220-240Va.c. 50/60Hz	
Fascia colour: White RAL 9003	Electrical Classification: Class II	
IP Rating: IP44	Power Factor: > 0.5	
Beam Angle: 100°	Protection: Overload / Short Circuit	
CRI: > 85	Lifespan: >102,000hrs@Ta25°C(L70)	
SDCM: < 3	Operating Ambient Temperature: -20 to 40°C	
IC Rating: IC-4	Smart: KASTA Compatible	

Residential Downlights

DIMENSIONS (mm)

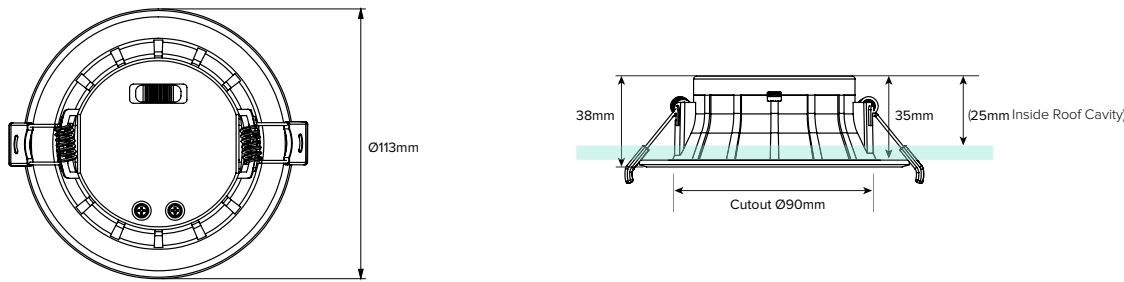


ACCESSORIES

Description	Product Code
Clip-on Trim Black	TRIM-VIVA-BLK
Clip-on Trim Gold	TRIM-VIVA-GLD
Clip-on Trim Nickel	TRIM-VIVA-NKL



Description	Product Code
Adaptor Ring (Cut Out Ø100-125 mm)	TRIM-VIVA-130
Adaptor Ring (Cut Out Ø120-165 mm)	TRIM-VIVA-170

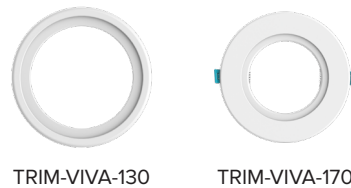

Description	Product Code
Surface Mount Kit	SM-ENC-DL
Suspension Kit	SM-ENC-SUSKIT

