



## VIVA<sup>REM</sup>

**VIVA-REM**  
SAP CODE: 2002397




### Practicality meets sleek versatility.

VIVA REM from Haneco builds on the legacy of the VIVA and adds the flexibility of incorporating a remote driver for those unique installations that require a thin luminaire. The VIVA REM features tritone colour technology, dimming capabilities, a flicker-free driver, and a 10W output, all wrapped in an extremely low-profile housing that can meet any application.

#### APPLICATIONS

Bedrooms, Lounge Room, Dining Area, Laundry, Butler Pantry, Hallways, Entrance, Staircase, Bathrooms, Ensuite, Theatre Rooms, Games Rooms, Function Areas, Hotel Rooms, Kitchen / Food Prep


#### DIMENSION DIAGRAMS



#### Disclaimer

NOTE1: SDCM values measured on 3K/5.7K CCT


#### PHOTOMETRIC DIAGRAM



Unit: cd

— C0/180 104.4deg  
— C90/270 102.5deg  
— C90/270 102.5deg

Photometric diagram shown is for 4000K output.

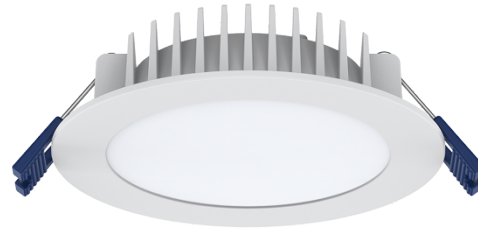

#### KEY INFORMATION

Power	10 W
Lumen Output	1054 / 1138 / 1032 lm
Cutout Size	Ø 90 mm
Mounting Type	Recessed
Dimming Type	Phase-Cut Dimmable (Trailing Edge, 10-100%)
Body Colour	White (RAL9003)
IP Rating	IP54 F - IP20 B
IC Rating	Do Not Cover
Operating Ambient Temp.	-20 to 40°C
Connection Type	750mm Flex & Plug
Driver	Remote
Warranty	5 yrs

#### PHOTOMETRIC

Efficacy	105 / 113 / 104 lm/W
CCT	3000 / 4000 / 5700 K
CRI	> 85
SDCM	< 3
UGR	> 25
Beam Angle	100°
Flicker-Free	Yes
Projected Lifespan	>60,000hrs@Ta25°C(L80)

#### ELECTRICAL

Input Voltage	220-240Vac 50/60Hz
Power Factor	> 0.9
Electrical Classification	Class II
Surge Protection	Overload / Short Circuit

#### OTHERS

Adjustable Angle	Not applicable
Body Material	Polycarbonate
Diffuser Material	Polycarbonate (Opal)
Rebate Scheme Approvals	Not Applicable
Weight	0.2 kg
Dimensions	Ø110 x 30 mm