



XBOX

XBOX15W-TRI

SAP CODE: 2002563


Adjustable modular design.

The highly flexible XBOX range combines multiple four-way adjustable LED downlights in square or rectangular frames, which can point in almost any direction.


APPLICATIONS

Restaurants / Cafes, Retail Spaces, Hotel Common Areas

DIMENSION DIAGRAMS

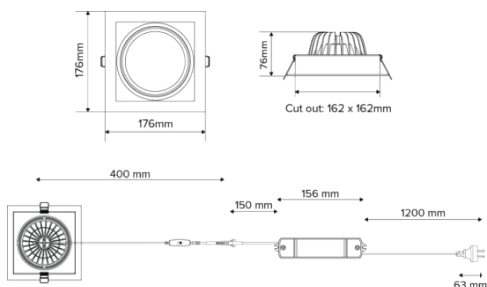

PHOTOMETRIC DIAGRAM



Unit: cd
 - C0/180 68.0deg
 - C30/210 68.0deg
 - C60/240 68.0deg
 - C90/270 68.0deg

KEY INFORMATION

Power	8 W 10 W 12 W 15 W
Lumen Output	925 / 968 / 989 lm 1171 / 1232 / 1254 lm 1335 / 1413 / 1429 lm 1460 / 1543 / 1558 lm
Cutout Size	162 x 162 mm
Mounting Type	Recessed
Dimming Type	Phase-Cut Dimmable (Trailing Edge, 10-100%)
Body Colour	White
IP Rating	IP40 F - IP20 B
IC Rating	Non-IC
Operating Ambient Temp.	-25 to 45°C
Connection Type	1.1m Flex & Plug
Driver	remote
Warranty	5 yrs

PHOTOMETRIC

Efficacy	8 W: 109 / 117 / 117 lm/W 10 W: 109 / 118 / 116 lm/W 12 W: 108 / 117 / 114 lm/W 15 W: 106 / 115 / 112 lm/W
CCT	3000 / 4000 / 5000 K
CRI	> 80
SDCM	< 3
UGR	> 25
Beam Angle	70°
Flicker-Free	Yes
Projected Lifespan	>54,000hrs@Ta25°C(L80)

ELECTRICAL

Input Voltage	220-240Vac, 50-60Hz
Driver Output Voltage	21 - 42 Vdc
Driver Output Current	350 mA
Power Factor	> 0.9
Electrical Classification	Class II
Surge Protection	Overload / Short Circuit

OTHERS

Adjustable Angle	-30 - 30°
Body Material	Aluminium
Diffuser Material	Polycarbonate (Clear)
Rebate Scheme Approvals	Not Applicable
HACCP Approval	No
Weight	960g
Dimensions	176 x 176 x 76 mm