



XBOX

XBOX30W-TRI

SAP CODE: 2002564



Adjustable modular design.

The highly flexible XBOX range combines multiple four-way adjustable LED downlights in square or rectangular frames, which can point in almost any direction.


APPLICATIONS

Retail Spaces, Restaurants / Cafes, Hotel Common Areas

DIMENSION DIAGRAMS

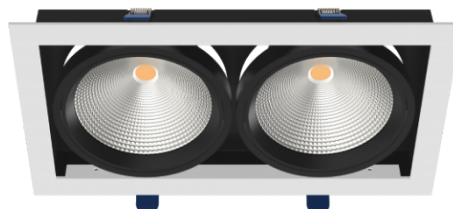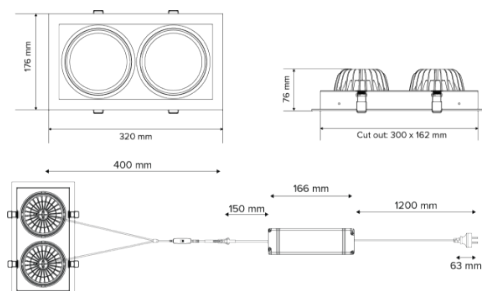

PHOTOMETRIC DIAGRAM



Unit: cd

— C0/180 70.2deg
— C30/210 70.2deg
— C60/240 70.2deg
— C90/270 70.2deg

KEY INFORMATION

Power	2 x 15 W
Lumen Output	3063 / 3254 / 3258 lm
Cutout Size	300 x 162 mm
Mounting Type	Recessed
Dimming Type	Phase-Cut Dimmable (Trailing Edge, 10-100%)
Body Colour	White
IP Rating	IP40 F - IP20 B
IC Rating	Non-IC
Operating Ambient Temp.	-25 to 45°C
Connection Type	1.1m Flex & Plug
Driver	remote
Warranty	5 yrs

PHOTOMETRIC

Efficacy	114 / 124 / 120 lm/W
CCT	3000 / 4000 / 5000 K
CRI	> 80
SDCM	< 3
UGR	> 25
Beam Angle	70°
Flicker-Free	Yes
Projected Lifespan	>54,000hrs@Ta25°C(L80)

ELECTRICAL

Input Voltage	220-240Vac, 50-60Hz
Driver Output Voltage	28 - 56 Vdc
Driver Output Current	700 mA
Power Factor	> 0.9
Electrical Classification	Class II
Surge Protection	Overload / Short Circuit

OTHERS

Adjustable Angle	-30 - 30°
Body Material	Aluminium
Diffuser Material	Polycarbonate (Clear)
Rebate Scheme Approvals	Not Applicable
HACCP Approval	No
Weight	1630 g
Dimensions	320 x 176 x 76 mm