




XBOX

Commercial Downlights


CLASS 2
Double Insulated


DIM
Phase Cut
Dimming


IP40
Ingress
Protection
Rating


0-35°
Adjustment
Angle


50,000hr
Expected
Lifetime


5yr
Warranty

Adjustable modular design.

The highly flexible XBOX range combines multiple four-way adjustable LED downlights in square or rectangular frames, which can point in almost any direction.

Features

- Individually four-way adjustable downlights
- Single, double and triple units
- Multifaceted reflector with clear lens
- Available in square or rectangular frames
- Complete with flex and plug

Benefits

- Light exactly where you need it
- Almost unlimited flexibility
- Enhanced glare control
- To suit most design areas
- Quick and easy installation

Product Overview

| MODULE | POWER | LUMENS | EFFICACY | CCT | CUTOUT | WEIGHT | SAP CODE | PRODUCT CODE |
|-----------------|-------|---------|----------|-------|-------------|--------|----------|-------------------------|
| Single | 10W | 820 lm | 82 lm/W | 3000K | 97 x 97mm | 0.60kg | 2000520 | D10W112*112RE3KW |
| Double | 20W | 1620 lm | 81 lm/W | 3000K | 187 x 97mm | 1.10kg | 2000527 | D20W200*112RE3KW |
| Triple | 30W | 2230 lm | 74 lm/W | 3000K | 267 x 97mm | 1.28kg | 2000529 | D30W280*112RE3KW |
| Single with Box | 15W | 1170 lm | 78 lm/W | 3000K | 162 x 162mm | 0.98kg | 2000522 | D15W176*176RE3KW |
| Double with Box | 30W | 2390 lm | 80 lm/W | 3000K | 300 x 162mm | 2.05kg | 2000531 | D30W320*176RE3KW |

SPECIFICATIONS

| | | | |
|---------------------------|---------------------------|---------------------------------------|------------------------------------|
| Body Material: | Aluminium | Driver: | Remote |
| Diffuser Material: | Polycarbonate (Clear) | Power Lead: | 1.1m Flex & Plug |
| Reflector: | Multifaceted | Link Lead: | 150mm Cable with JST Connector |
| Fascia colour: | White: RAL 9010 | Input: | 220-240V, 50/60Hz |
| IP Rating: | Front: IP40 Body: IP40 | Electrical Classification | Class 2 |
| Beam Angle: | 45° | Power Factor: | >0.9 |
| Gimbal: | 0-35° | Protection: | Overload / Short Circuit |
| CRI: | >80 (>90 option) | Lifespan: | >50,000hrs @Ta25°C (L70) |
| SDCM: | <5 (<3 option) | Operating Ambient Temperature: | -20 to 50°C |
| | | Smart: | KASTA Compatible |
| | | Dimming: | Phase-Cut Dimmable (Trailing Edge) |

APPLICATIONS


Retail
Cafes
Restaurants
Hotels

Commercial Downlights



DIMENSIONS

| Product Code: | D10W112*112RE3KW | D20W200*112RE3KW | D30W280*112RE3KW | D15W176*176RE3KW | D30W320*176RE3KW |
|-----------------------|------------------|------------------|------------------|------------------|------------------|
| Modules: | Single | Double | Triple | Single with Box | Double with Box |
| Length: | 112mm | 200mm | 280mm | 176mm | 320mm |
| Width: | 112mm | 112mm | 112mm | 176mm | 176mm |
| Height: | 53mm | 57mm | 53mm | 160mm | 160mm |
| Cut Out: | 97 x 97mm | 187 x 97mm | 267 x 97mm | 162 x 162mm | 300 x 162mm |
| Remote Driver: | 114 x 45 x 30mm | 155 x 45 x 30mm | 155 x 45 x 30mm | 135 x 45 x 30mm | 155 x 45 x 30mm |

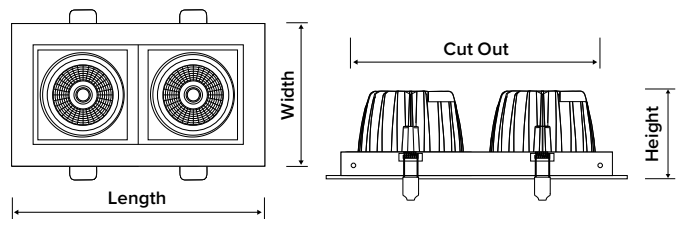

FIND OUT MORE:

