



AURORA 80

Residential Downlights



DIM
Phase Cut
Dimming



IP44
Ingress
Protection
Rating



IC-4
Covered &
Abutted



50,000hr
Expected
Lifetime



5yr
Warranty

Compact, low glare and versatile.

AURORA 80 is a dimmable LED downlight with a low glare flush opal diffuser. IC-4 rating ensures installation is as easy as possible and safe.

Features

- Available in 3000K or 5000K
- Low glare diffuser
- Remote dimmable driver
- Complete with flex and plug
- Premium brushed nickel finish

Benefits

- Warm or cool colour temperature
- Enhanced visual comfort
- Energy saving and comfort
- Quick and easy installation
- Stylish high end appearance

POWER	LUMENS	EFFICACY	CCT	CUTOUT	WEIGHT	FASCIA	SAP CODE	PRODUCT CODE
7W	540 lm	77 lm/W	3000K	Ø72mm	0.39kg	White	2000046	AURORA80A01
7W	540 lm	77 lm/W	3000K	Ø72mm	0.39kg	Nickel	2000048	AURORA80B01
7W	600 lm	86 lm/W	5000K	Ø72mm	0.39kg	White	2000047	AURORA80A02

SPECIFICATIONS

Body Material:	Aluminium	Driver:	Remote
Diffuser Material:	Polycarbonate (Opal)	Power Lead:	1.1m Flex & Plug
Fascia Colour:	White Nickel	Input:	220-240V, 50/60Hz
IP Rating:	Front: IP44 Body: IP40	Electrical Classification:	Class 2
IC Rating	IC-4 (ta 25°C)	Power Factor:	>0.9
Beam Angle:	85°	Protection:	Overload / Short Circuit
CRI:	>80 (>90 option)	Lifespan:	>50,000hrs @Ta25°C (L70)
SDCM:	<5 (<3 option)	Operating Ambient Temperature:	-20 to 50°C
		Smart:	KASTA Compatible
		Dimming:	Phase-Cut Dimmable (Trailing Edge) DALI Dimmable Models Available. See Page 212.

APPLICATIONS

Residential
Hospitality
Office




White



Nickel



DIMENSIONS

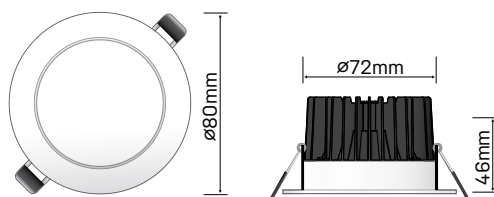

Remote Driver 120x45x27mm

AURORA80

FIND OUT MORE:

