



DETAIL

Residential Downlights



DIM
Phase Cut
Dimming



IP65
Ingress
Protection
Rating



IC-4
Covered &
Abutted



0-30°
Adjustment
Angle



50,000hr
Expected
Lifetime



5yr
Warranty

Adjustable moisture-proof feature lighting.

DETAIL is a dimmable, adjustable LED downlight allowing for precision aiming. The glare reducing optical lens and IP65 rating, makes it the best choice for high end bathrooms and outdoor spaces.

Features

- IP65 ingress protection
- Tritone selectable
- Adjustable LED downlight
- Engineered and optimised optical lens
- Robust diecast aluminium construction

Benefits

- Ideal for bathrooms and outdoor areas
- Reduced SKUs and inventory levels
- Increased flexibility
- Best in class glare control
- Improved thermal characteristics

Product Overview

POWER	LUMENS	EFFICACY	CCT	CUTOUT	WEIGHT	FASCIA	SAP CODE	PRODUCT CODE
9W	990 lm	110 lm/W	3000K	Ø75mm	0.4kg	White	2000159	D9W110R3KWIP65
	1120 lm	125 lm/W	4000K				2000161	D9W110R4KWIP65
	980 lm	109 lm/W	5000K				2000164	D9W110R5KWIP65
9W	990 lm	110 lm/W	3000K	Ø75mm	0.4kg	Black	2000584	D9W110R3KBKIP65
	1120 lm	125 lm/W	4000K				2000160	D9W110R4KBKIP65
	980 lm	109 lm/W	5000K				2000585	D9W110R5KBKIP65

Residential Downlights

SPECIFICATIONS

Body Material:	Aluminium	Driver:	Remote
Diffuser Material:	Polycarbonate (Clear)	Power Lead:	1.1m Flex & Plug
Fascia colour:	White: RAL9010 Black: RAL9005	Input:	220-240V, 50/60Hz
IP Rating:	Front: IP65 Body: IP65	Electrical Classification:	Class 2
IC Rating	IC-4 (ta 25°C)	Power Factor:	>0.9
Beam Angle:	60°	Protection:	Overload / Short Circuit
Gimbal:	0-30°	Lifespan:	>50,000hrs @Ta25°C (L70)
CRI:	>80 (>90 option)	Operating Ambient Temperature:	-20 to 50°C
SDCM:	<5 (<3 option)	Smart:	KASTA Compatible
		Dimming:	Phase-Cut Dimmable (Trailing Edge) (1-100%) DALI Dimmable Models Available. See Page 212.

APPLICATIONS

Residential
Bathrooms
Hospitality
Kitchens

ACCESSORIES

Surface Mount Kit:
SM-ENC-DL
(SAP 2001870)



Suspension Kit:
SM-ENC-SUSKIT
(SAP 2001871)




White



Black

DIMENSIONS

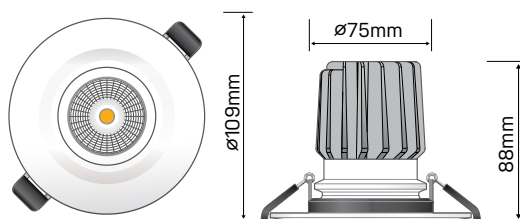

Remote Driver 120x45x27mm

D9W110R*K*IP65

FIND OUT MORE:

