



SKYPAD

Highbays



Heavy duty.

SKYPAD has become an Aussie icon in highbay lighting since its introduction in 2014. It is a powerful and adaptable solution due to its large variety of accessories, including a pre-fitted surface mount bracket. Featuring IP67 and IK10 ratings as well as the ability to function in ambient temperatures of up to 60°C, makes it the ideal choice for heavy duty industrial applications, especially in warmer Australian climates.

Features

- IP67 and IK10 rating
- Ambient temperature range -30 to 60°C
- Heavy duty powder coated aluminium body
- 2.5m UV resistant flex and plug included
- Sensor options and KASTA compatible
- Various accessories available

Benefits

- Built to last in harsh environments
- Suitable for heavy industry
- Improved heat dissipation and longevity
- Easier to install
- Easy system integration
- Extended application options

POWER	LUMENS	EFFICACY	CCT	DIMENSIONS	WEIGHT	SAP CODE	PRODUCT CODE
120W	17320 lm	144 lm/W	5000K	Ø320 x 268mm	4.00kg	2000881	SKYPAD120W-10VDIM
200W	28000 lm	140 lm/W	5000K	Ø320 x 278mm	5.50kg	2000908	SKYPAD200W-V2

SPECIFICATIONS

Body Material:	Aluminium	Driver:	Remote
Diffuser Material:	Polycarbonate (Clear)	Power Lead:	2.5m Flex & Plug
Body colour:	Black	Input:	220-240V, 50/60Hz
IP Rating:	IP67	Electrical Classification:	Class 1
IK Rating:	IK10	Power Factor:	>0.9
Beam Angle:	110°	Protection:	Overload / Short Circuit
CRI:	>80	Lifespan:	>50,000hrs @Ta25°C (L70)
SDCM:	<5	Operating Ambient Temperature:	-30 to 60°C
		Smart:	KASTA Compatible
		Dimming:	1-10V Dimmable



MOTION SENSOR

SUNMAX Smart Control
SUNMAX50MA-W-IP20
(SAP 2000878)

- Daylight sensor with smart control. Ideal for daylight harvesting applications

Steel Mounting Bracket (Black)
SUNMAX-BRKT
(SAP 2000891)



INTELLISENSOR

Intellisensor Smart Control
MC054V-WIRELESS
(SAP 2002011)

- Microwave motion sensor
- Corridor function (low level comfort lighting when no presence is detected. Turns on to full brightness when presence is detected.)
- Energy efficient

MC054V-REMOTE
(SAP 4000378)
Easily reprogram intellisensor with this wireless remote

APPLICATIONS

Warehouses
Factories
Sheds
Industrial
Large Commercial Spaces

ACCESSORIES

Open Prismatic Diffuser
SKYPAD-PRSDIF
(SAP 2000396)
Closed Prismatic Diffuser
SKYPAD-PRSDIF-EN
(SAP 2000827)




Metal Reflector 90°
HRPAD90DB
(SAP 2000292)



Extension Bracket
FL-SKYPADKIT
(SAP 2000196)



Surface Mount Kit
SKYPAD-FGSMK001
(SAP 2000395)
350 x 345 x 345mm
(Food Safe)



Polycarbonate Diffuser
PCD-SKYPAD
(SAP 2000350)




Wire Guard
SKYPAD-WIREGUARD
(SAP 2000399)




Highbays and Lowbays

DIMENSIONS

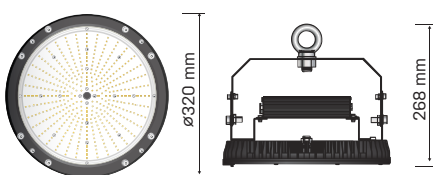

SKYPAD120W-10VDIM

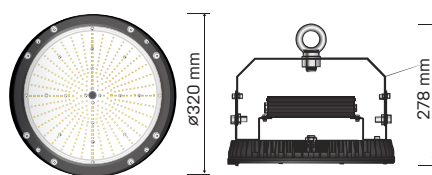

SKYPAD200W-V2

FIND OUT MORE:

