





PANNELLO

PANNELLO-LV-AR

SAP CODE: 2001976

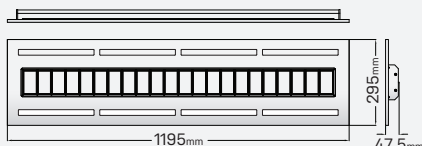

Photometric Diagram



Unit: cd
C0/180 81.0deg
C90/270 70.2deg

40/36/32/26W LED Troffer with Air-return

The PANNELLO is a Tritone LED troffer with quadruple power selection and a flicker-free driver.



KEY INFORMATION

Lumen Output	40W	3820 / 4090 / 3950lm
	36W	3630 / 3900 / 3810lm
	32W	3330 / 3560 / 3470lm
	26W	2760 / 2910 / 2870lm
Input Power	40W, 36W, 32W, 26W	
Hole Cutout Size	N/A	
Install	Metric T-Bar Ceiling Grid	
Dimming Options	Non-Dimmable	
Fitting Colour	WHITE	
Warranty	5yr	
IP Rating	IP40	
IK Rating	N/A	
IC Rating	N/A	
Rebate Scheme Approvals		

PHOTOMETRIC

Efficacy	40W	96 / 102 / 99lm/W
	36W	101 / 108 / 106lm/W
	32W	104 / 111 / 108lm/W
	26W	106 / 112 / 111lm/W
LED	SMD	
CCT	3000 / 4000 / 5000K	
CRI	>80	
Beam Angle	75°	

ELECTRICAL

Driver	Remote
Supply Input	220-240V, 50/60Hz
Driver Output Voltage	40V DC
Power Factor	>0.9
LED Input Current (nominal)	700-1000mA
Useful life @Ta25° (L70)	50,000hr

CONSTRUCTION

Housing	Steel
Optics	Polycarbonate Diffuser
Adjustable Angle	N/A
Fixings/Hardware	N/A
Connection Type	1.2m Flex
Total Weight	3.1kg
Dimensions	1195 x 295 x 38.6mm
Operating Ambient Temp.	-20 to 45°C
Electrical Classification	Class 2