

Exit and Emergency Lighting















Haneco Lighting Australia is one of Australia's leading suppliers of LED Lighting Solutions.

Haneco's extensive LED Lighting Portfolio has been developed to suit all manner of applications – residential, commercial and industrial.

Our Exit and Emergency Lighting forms an integral part of our range of commercial and industrial lighting solutions.
Reliable and energy efficient, all Haneco's Exit and Emergency Lighting meets
AS/NZS2293 standards.

Haneco Lighting Australia offers a complete range of Exit and Emergency Lighting that is safe, reliable and high quality.



Contents

| LUMINAIRES |
|------------------|
| LUME02 |
| LUME REMOTE03 |
| EXIT SIGNS |
| ESODO BOX04 |
| ESODO IP6505 |
| ESODO EDGE 24m06 |
| ESODO EDGE 40m08 |
| FLOODLIGHTS |
| DUET09 |
| BATTENS |
| TRIPROOF EM10 |
| DURA EM10 |
| VISTA EM10 |
| VISTA LINE EM10 |
| VISTA HERO EM11 |
| OXFORD EM11 |
| OYSTERS |
| PURO EM11 |
| DISCUS EM11 |
| BULKHEADS |
| DAWN EM12 |
| DAWN HERO EM12 |
| PANELS |



LUME

Emergency Luminaires









A reliable path to building safety.

LUME is a sleek, emergency luminaire suitable for a large variety of applications, due to its recessed and surface mounting options. Using reliable lithium iron phosphate (LiFePO4) battery technology, this state-of-the-art product ensures low maintenance and energy efficiency. Compliant to AS/NZS 2293.3, offering D40/D63 emergency classification.

Features

- D40 or D63 emergency classification
- Simple test button
- IC-4 Rating allows covering with insulation
- LiFePO4 battery compliant with AS2293.3
- More than 2 hours discharge time
- Available in surface mount and black or white finish

Benefits

- · Optimised product spacings
- Easy maintenance
- Simple and quick installation
- · Peace of mind for end user
- Ensured and guaranteed safety
- Suitable for a wide range of applications

Accessories

Ø140mm Adaptor (Ø110mm Cut Out) (Included)

Suspension Kit: SM-ENC-SUSKIT (SAP 2001871)

(Connects to Surface Mount Only)

Product Overview

| POWER (Standby) | POWER (Charging) | DISCHARGE TIME | RECHARGE TIME | LUMENS | сст | EMERGENCY CLASSIFICATION | сит оит | SAP CODE | PRODUCT CODE |
|--------------------|---------------------|-------------------|------------------|--------|-------|-----------------------------|------------------------|--------------------|---------------------------------|
| 0.5W | 1.5W | >2 hours | 16 hours | 100lm | 5700K | D40 | Ø90/110mm Ø90/110mm | 2002009 2002176 | LUME1WD40 LUME1WD40-BK |
| 0.5W | 4W | >2 hours | 16 hours | 340lm | 5700K | D63 | Ø90/110mm Ø90/110mm | 2001853 2001872 | LUME3WD63 LUME3WD63-BK |
| 0.5W | 4W | >2 hours | 16 hours | 340lm | 5700K | D63 | - - | 2001869 2001873 | LUME3WD63-SM LUME3WD63-SM-BK |

SM = Surface Mount **BK** = Black



LUME REMOTE

Emergency Luminaires



LUME REMOTE is a sleek, emergency luminaire suitable for an extended variety of applications. The foldable flex driver enables installation in locations with limited ceiling space. Using reliable lithium iron phosphate (LiFePO4) battery technology, this state-of-the-art product ensures low maintenance and energy efficiency. Compliant to AS/NZS 2293.3, offering D40/D63 emergency classification.

Features

- D40 or D63 emergency classification
- Simple test button
- IC-4 Rating allows covering with insulation
- · LiFePO4 battery compliant with AS2293.3
- More than 2 hours discharge time
- · Available in black or white finish

Benefits

- · Optimised product spacings
- Easy maintenance
- · Simple and quick installation
- · Peace of mind for end user
- Enables installation in tight spaces
- Suitable for a wide range of applications









Accessories

Ø110mm Adaptor (Ø90mm Cut Out)

Ø140mm Adaptor (Ø110mm Cut Out)





Product Overview

| POWER (Standby) | POWER (Charging) | DISCHARGE TIME | RECHARGE TIME | LUMENS | сст | EMERGENCY CLASSIFICATION | HOLE CUT | SAP CODE | PRODUCT CODE |
|--------------------|---------------------|-------------------|------------------|--------|-------|-----------------------------|--------------|--------------------|-------------------------------------|
| 1W | 2.5W | 3 hours | 16 hours | 100lm | 5700K | D40 | Ø43/90/110mm | 2002088 2002177 | LUME1WD40-REMOT LUME1W-D40-RE-BK |
| 2.5W | 4.5W | 3 hours | 16 hours | 300lm | 5700K | D63 | Ø43/90/110mm | 2002089 2002178 | LUME3WD63-REMOT LUME3W-D63-RE-BK |

REMOT = Remote Driver **RE** = Remote Driver BK = Black



haneco.com.au Issue 04/07/2022



ESODO BOX

Emergency Exit Signs









Conventional and reliable.

ESODO BOX is an LED emergency EXIT sign presented in a conventional and discrete box design. With the installer in mind, it allows for easy and quick surface installation.

Features

- Simple installation
- Easy accessible manual test button
- 24m viewing distance
- High efficiency LED back-lit sign
- LiFePO4 battery compliant with AS2293.3
- Replaceable decals supplied
- · Also available in black

Benefits

- · Saving installation time
- Simple maintenance
- Ensured safety throughout the building
- Homogeneously lit sign
- · Peace of mind for the end user
- The correct sign for every application
- Suitable for low illuminance applications

Accessories

Replaceable Pictogram Set: (Supplied with Product)

Exit



Exit Right



Exit Left



Product Overview

| POWER (Standby) | POWER (Charging) | DISCHARGE TIME | RECHARGE TIME | EMERGENCY CLASSIFICATION | SAP CODE | PRODUCT CODE |
|--------------------|---------------------|----------------|---------------|-----------------------------|--------------------|-----------------------------|
| 1W | 3W | >2 hours | 16 hours | C0: D2.5 C90: D2.0 | 2002086 2002189 | ESD24M-BOX ESD24M-BOX-BK |

24M = 24m viewing distance **BK** = Black



ESODO

Emergency Exit Signs











Robust vandal and weatherproof construction.

ESODO IP65 is a robust vandal resistant LED emergency EXIT sign built for harsh environments. Even though ESODO IP65 has been designed to last, no compromise has been made with regards to maintenance and user friendliness.

Features

- High efficiency LED
- IP65 and IK08
- 24m viewing distance
- More than 1.5 hours of discharge time
- LiFePO4 battery compliant with AS2293.3
- Replaceable decals supplied
- · Also available in black

Benefits

- Long lifetime and low power consumption
- Moisture proof vandal resistant
- · Ensured safety throughout the building
- · Homogeneously lit sign
- Peace of mind for the end user
- The correct sign for every application
- Suitable for low illuminance applications

Accessories

Replaceable Pictogram Set: (Supplied with Product)





Exit Right



Exit Left



Product Overview

| POWER (Standby) | POWER (Charging) | DISCHARGE TIME | RECHARGE TIME | EMERGENCY CLASSIFICATION | SAP CODE | PRODUCT CODE |
|--------------------|---------------------|----------------|---------------|-----------------------------|--------------------|-------------------------------|
| 1.5W | 3W | >1.5 hours | 16 hours | E6.3 | 2002085 2002174 | ESD24M-IP65 ESD24M-IP65-BK |

24M = 24m viewing distance **BK** = Black



haneco.com.au Issue 04/07/2022



ESODO EDGE

Emergency Exit Signs









Architectural slimline design.

ESODO EDGE is a super slim LED emergency EXIT sign for multiple surface mounting options. With its blade style and slick edge-lit design ESODO EDGE will also provide safety in high-end architectural applications.

Features

- 5-in-1 surface mount fitting
- Super slim design
- 24m viewing distance
- More than 1.5 hours discharge time
- LiFePO4 battery compliant with AS2293.3
- Replaceable decals supplied
- · Also available in black

Benefits

- Unlimited flexibility and installer friendly
- Pleasing aesthetics
- Ensured safety throughout the building
- · Ensured and guaranteed safety
- · Peace of mind for the end user
- The correct sign for every application
- · Suitable for low illuminance applications

Accessories

(Surface Mount Model Only)

Side Mount Bracket: ESD-SIDE (SAP 2002179)

Replaceable Pictogram Set: (Supplied with Product)









Exit Left



Product Overview

| POWER (Standby) | POWER (Charging) | DISCHARGE TIME | RECHARGE TIME | EMERGENCY CLASSIFICATION | SAP CODE | PRODUCT CODE |
|--------------------|---------------------|----------------|---------------|-----------------------------|--------------------|---------------------------|
| 1.5W | 3W | >1.5 hours | 16 hours | E6.3 | 2002084 2002173 | ESD24M-SM ESD24M-SM-BK |

24M = 24m viewing distance **SM** = Surface Mount **BK** = Black



EDGE ESODO

Emergency Exit Signs

Recessed slimline design.

ESODO EDGE (recessed) is a super slim LED emergency EXIT sign for a streamlined hidden recessed installation.

With its blade style and slick edge-lit design ESODO EDGE will also provide safety in high-end architectural applications.

Features

- · Super slim design
- Easy recessed installation
- · 24m viewing distance
- Easily accessible manual test button
- LiFePO4 battery compliant with AS2293.3
- Replaceable decals supplied
- · Also available in black

Benefits

- · Pleasing aesthetics
- Unobtrusive appearance
- · Ensured safety throughout the building
- · Simple maintenance
- · Peace of mind for the end user
- The correct sign for every application
- Suitable for low illuminance applications

LiFePC









Accessories

Replaceable Pictogram Set: (Supplied with Product)













Product Overview

| POWER (Standby) | POWER (Charging) | DISCHARGE TIME | RECHARGE TIME | EMERGENCY CLASSIFICATION | SAP CODE | PRODUCT CODE |
|--------------------|---------------------|----------------|---------------|-----------------------------|--------------------|---------------------------|
| 1.5W | 3W | >1.5 hours | 16 hours | E6.3 | 2002083 2002172 | ESD24M-RC ESD24M-RC-BK |

24M = 24m viewing distance **RC** = Recessed **BK** = Black



haneco.com.au Issue 04/07/2022



ESODO EDGE 40m











Extra large architectural slimline.

ESODO EDGE 40M is a super slim yet extra large LED emergency EXIT sign for surface mount installation. With its blade style and slick edge-lit design, it provides safety in large scale high-end architectural applications, where 25m viewing distance isn't enough.

Features

- 40m viewing distance
- Super slim design
- 5-in-1 surface mount fitting
- More than 1.5 hours discharge time
- LiFePO4 battery compliant with AS2293.3
- Replaceable decals supplied

Benefits

- Suitable for extra large applications
- Pleasing aesthetics
- · Unlimited flexibility and installer friendliness
- · Ensured and guaranteed safety
- · Peace of mind for the end user
- The correct sign for every application

Accessories

Replaceable Pictogram Set: (Supplied with Product)

Exit



Exit Right



Exit Left



Product Overview

| POWER (Standby) | POWER (Charging) | DISCHARGE TIME | RECHARGE TIME | EMERGENCY CLASSIFICATION | SAP CODE | PRODUCT CODE |
|--------------------|---------------------|----------------|---------------|-----------------------------|----------|--------------|
| 1.5W | 2.0 - 3.7W | 2 hours | 16 hours | C0: D8 C90: D10 | 2002192 | ESD40M-SM |

40M = 24m viewing distance **SM** = Surface Mount



DUET

Emergency Floodlights

Dual directional for egress pathways.

DUET dual lamp flood light provides illumination for both large and small areas that need to be flooded with light during an emergency. DUET provides brilliant illumination that enables building occupants to easily find their way to safety under any circumstance – facilitating the evacuation of the building in the event of an emergency.

Features

- High efficiency LED
- Fully adjustable dual lamp positioning
- Easily accessible manual test button
- LiFePO4 battery compliant with AS2293.3
- Complete with 1.2m flex and plug
- Available in black or white finish

Benefits

- Long lifetime and low power consumption
- Ensured safety throughout the building
- Simple maintenance
- · Peace of mind for the end user
- Ease of installation
- Suits most applications

Product Overview

| POWER (Standby) | POWER (Charging) | DISCHARGE TIME | RECHARGE TIME | LUMENS | сст | EMERGENCY CLASSIFICATION | SAP CODE | PRODUCT CODE |
|--------------------|---------------------|-------------------|------------------|---------------------|-------|-----------------------------|--------------------|---------------------|
| 3.5W | 4W | 3 hours | 16 hours | 250lm (per lamp) | 5700K | C0: D125 C90: D125 | 2002087 2002175 | DUET4W DUET4W-BK |

BK = Black



Emergency Range Product Index

| TRIPROOF EN | | | | | |
|-------------------------|---------|--------|--------------------------|--------|--------------------------|
| PRODUCT CODE | SAP | WATTS | EMERGENCY CLASSIFICATION | LENGTH | |
| TRIPROOF20W06-TRI-EM | 2001165 | 20W | C0: D40 C90: D25 | 618mm | - |
| TRIPROOF20/40W12-TRI-EM | 2001066 | 20/40W | C0: D63 C90: D32 | 1215mm | - |
| TRIPROOF40W12-TRI-SS-EM | 2001068 | 40W | C0: D50 C90: D32 | 1215mm | Integrated Intellisensor |
| TRIPROOF60W15-TRI-EM | 2001171 | 60W | C0: D50 C90: D32 | 1515mm | - |
| TRIPROOF12-EMDD | 2002253 | 40W | C0: D63 C90: D40 | 1215mm | DALI Dimmable |


| DURA EM Durable weatherp | roof battens | | | | |
|----------------------------------|--------------|--------------|--------------------------|--------|--------------------------|
| PRODUCT CODE | SAP | WATTS | EMERGENCY CLASSIFICATION | LENGTH | |
| DURA06-EM | 2002139 | 10/13/15/18W | C0: D40 C90: D25 | 655mm | - |
| DURA06-EM-MS | 2002141 | 10/13/15/18W | C0: D40 C90: D25 | 655mm | Integrated Intellisensor |
| DURA12-EM | 2002143 | 18/25/30/36W | C0: D100 C90: D63 | 1220mm | - |
| DURA12-EM-MS | 2002145 | 18/25/30/36W | C0: D100 C90: D63 | 1220mm | Integrated Intellisensor |


| VISTA EM Conventional indoo | r battens | | | | |
|-----------------------------|-----------|--------|--------------------------|--------|--------------------------|
| PRODUCT CODE | SAP | WATTS | EMERGENCY CLASSIFICATION | LENGTH | |
| VISTA20W06-TRI-EM | 2001158 | 20W | C0: D32 C90: D25 | 600mm | - |
| VISTA20/40W12-TRI-EM | 2001063 | 20-40W | C0: D50 C90: D32 | 1200mm | - |
| VISTA40W12-TRI-SS-EM | 2001065 | 40W | C0: D50 C90: D32 | 1200mm | Integrated Intellisensor |
| VISTA12-EMDD | 2002255 | 40W | C0: D63 C90: D40 | 1221mm | DALI Dimmable |

| VISTA ^{LINE} Slim body indoor battens | | | | | |
|---|---------|--------|--------------------------|--------|---|
| PRODUCT CODE | SAP | WATTS | EMERGENCY CLASSIFICATION | LENGTH | |
| VSL20W06-TRI-EM | 2001631 | 20W | C0: D50 C90: D32 | 600mm | - |
| VSL20/40W12-TRI-EM | 2001635 | 20-40W | C0: D50 C90: D32 | 1200mm | - |

VISTA HERO EM Wide body indoor battens PRODUCT CODE SAP WATTS **EMERGENCY CLASSIFICATION** LENGTH VISTA-HR12-EM 2001941 40/31/26/19W CO: D63 C90: D40 1165mm VISTA-HR12-EM-MS 2001943 40W CO: D63 C90: D40 1165mm Integrated Intellisensor

| OXFORD EM Low profile indoor battens | | | | | |
|--------------------------------------|---------|--------------|--------------------------|--------|--------------------------|
| PRODUCT CODE | SAP | WATTS | EMERGENCY CLASSIFICATION | LENGTH | |
| OXFORD12-EM | 2001886 | 40/32/29/20W | C0: D50 C90: D40 | 1221mm | - |
| OXFORD12-EM-MS | 2001888 | 40W | C0: D50 C90: D40 | 1221mm | Integrated Intellisensor |

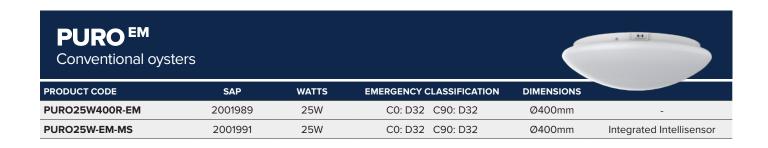

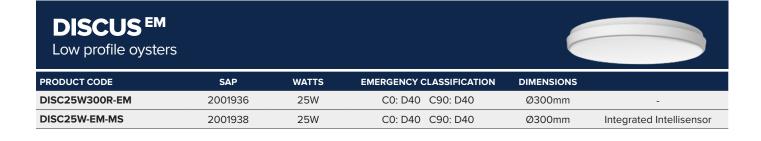

Emergency Range Product Index Continued.

DAWN EM Robust exterior bulkheads PRODUCT CODE SAP WATTS **EMERGENCY CLASSIFICATION DIMENSIONS** DN20WRND-TRI-EM 2001911 20W CO: D25 C90: D25 Ø275mm DN30WRND-TRI-EM 2001914 30W CO: D25 C90: D25 Ø350mm

| DAWN HEF Robust exterior bu | | | | | |
|------------------------------------|---------|-------|--------------------------|------------|--------------------------|
| PRODUCT CODE | SAP | WATTS | EMERGENCY CLASSIFICATION | DIMENSIONS | |
| DN9WHR-EM | 2002289 | 9W | C0: D32 C90: D32 | Ø300mm | - |
| DN9WHR-MS-EM | 2002290 | 9W | C0: D32 C90: D32 | Ø300mm | Integrated Intellisensor |

| MATRIX ^{EM} Reliable back-lit panels | | | | | |
|---|---------|-------|--------------------------|------------|---|
| PRODUCT CODE | SAP | WATTS | EMERGENCY CLASSIFICATION | DIMENSIONS | |
| MATRIX18W0306 | 2001957 | 18W | CO: D50 C90: D50 | 300x600mm | Emergency accessory kit: EMLED-2.4W-3H-60V 40PL |
| MATRIX36W0312 | 2001959 | 36W | CO: D50 C90: D50 | 300x1200mm | |
| MATRIX36W0606 | 2001961 | 36W | CO: D50 C90: D50 | 600x600mm | |
| MATRIX48W0612 | 2001962 | 48W | CO: D40 C90: D50 | 600x1200mm | |

OUR LOCATIONS

Australia-wide coverage





Issue 04/07/2022 haneco.com.au

Find out more











