



FLEXION G2 KIT

Strip Lighting



Create curious environments.

The FLEXION G2 KIT of LED strips offers unlimited flexibility and installation freedom, all in one complete set. IP20 or IP65 options make it is the right tool for enhancing your applications appearance, indoors or outdoors.

Features

- Extremely flexible LED strip, IP20 or IP65
- 5m LED kit, complete with driver
- High CRI > 90
- 24V Extra low voltage
- Further reduced trimmable length
- Adhesive backing
- Available in 3 levels of intensity

Benefits

- Almost unlimited design freedom
- All parts within one code
- Excellent for colour-critical applications
- Ensured safety
- Increased flexibility
- Simplest installation on smooth surfaces
- Versatile and adaptable

Product Overview

POWER	IP RATING	LEDS (per metre)	LUMENS (per metre)	EFFICACY	CCT	LENGTH	CUTTING INTERVALS	SAP CODE	PRODUCT CODE
25W (5W/m)	IP20	60	531 lm	105 lm/w	3000K	5m	100mm	2002017	FX25W5M3K-IP20
		60	533 lm	105 lm/w	4000K	5m	100mm	2002015	FX25W5M4K-IP20
		60	510 lm	105 lm/w	6500K	5m	100mm	2002013	FX25W5M6K-IP20
	IP65	60	505 lm	105 lm/w	3000K	5m	100mm	2002018	FX25W5M3K-IP65
		60	514 lm	105 lm/w	4000K	5m	100mm	2002016	FX25W5M4K-IP65
		60	494 lm	105 lm/w	6500K	5m	100mm	2002014	FX25W5M6K-IP65
40W (8W/m)	IP20	120	668 lm	100 lm/w	3000K	5m	50mm	2002023	FX40W5M3K-IP20
		120	696 lm	100 lm/w	4000K	5m	50mm	2002021	FX40W5M4K-IP20
		120	706 lm	100 lm/w	6500K	5m	50mm	2002019	FX40W5M6K-IP20
	IP65	120	626 lm	100 lm/w	3000K	5m	50mm	2002024	FX40W5M3K-IP65
		120	585 lm	100 lm/w	4000K	5m	50mm	2002022	FX40W5M4K-IP65
		120	521 lm	100 lm/w	6500K	5m	50mm	2002020	FX40W5M6K-IP65
75W (15W/m)	IP20	160	1299 lm	90 lm/w	3000K	5m	31.25mm	2002029	FX75W5M3K-IP20
		160	1463 lm	90 lm/w	4000K	5m	31.25mm	2002027	FX75W5M4K-IP20
		160	1415 lm	90 lm/w	6500K	5m	31.25mm	2002025	FX75W5M6K-IP20
	IP65	160	1135 lm	90 lm/w	3000K	5m	31.25mm	2002030	FX75W5M3K-IP65
		160	1158 lm	90 lm/w	4000K	5m	31.25mm	2002028	FX75W5M4K-IP65
		160	996 lm	90 lm/w	6500K	5m	31.25mm	2002026	FX75W5M6K-IP65

SPECIFICATIONS

Hardware:	Self-Adhesive Backing	Driver:	Remote
Fascia colour:	White	Power Lead:	1m Flex & Plug
IP Rating:	IP20 IP65	Link Lead:	600mm Cable with JST Connector
Beam Angle:	120°	Input:	220-240V, 50/60Hz
CRI:	>90	Power Factor:	>0.9
SDCM:	<5 (<3 option)	Protection:	Overload / Short Circuit
		Lifespan:	>50,000hrs @Ta25° (L70)
		Operating Ambient Temperature:	-20 to 40°C
		Smart:	KASTA Compatible
		Dimming:	Non-Dimmable
			Dimmable Drivers Available Page 212

APPLICATIONS

Hospitality
Residential
Commercial

ACCESSORIES


See page 112

Linear and Track Lighting



Kit includes:
5m FLEXION strip
1x Driver with flex & plug

DIMENSIONS

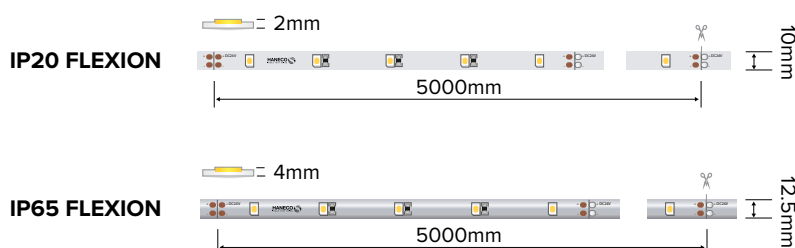

FIND OUT MORE:

